


Selection diagram




- product option
- ➔ Sold separately as accessory

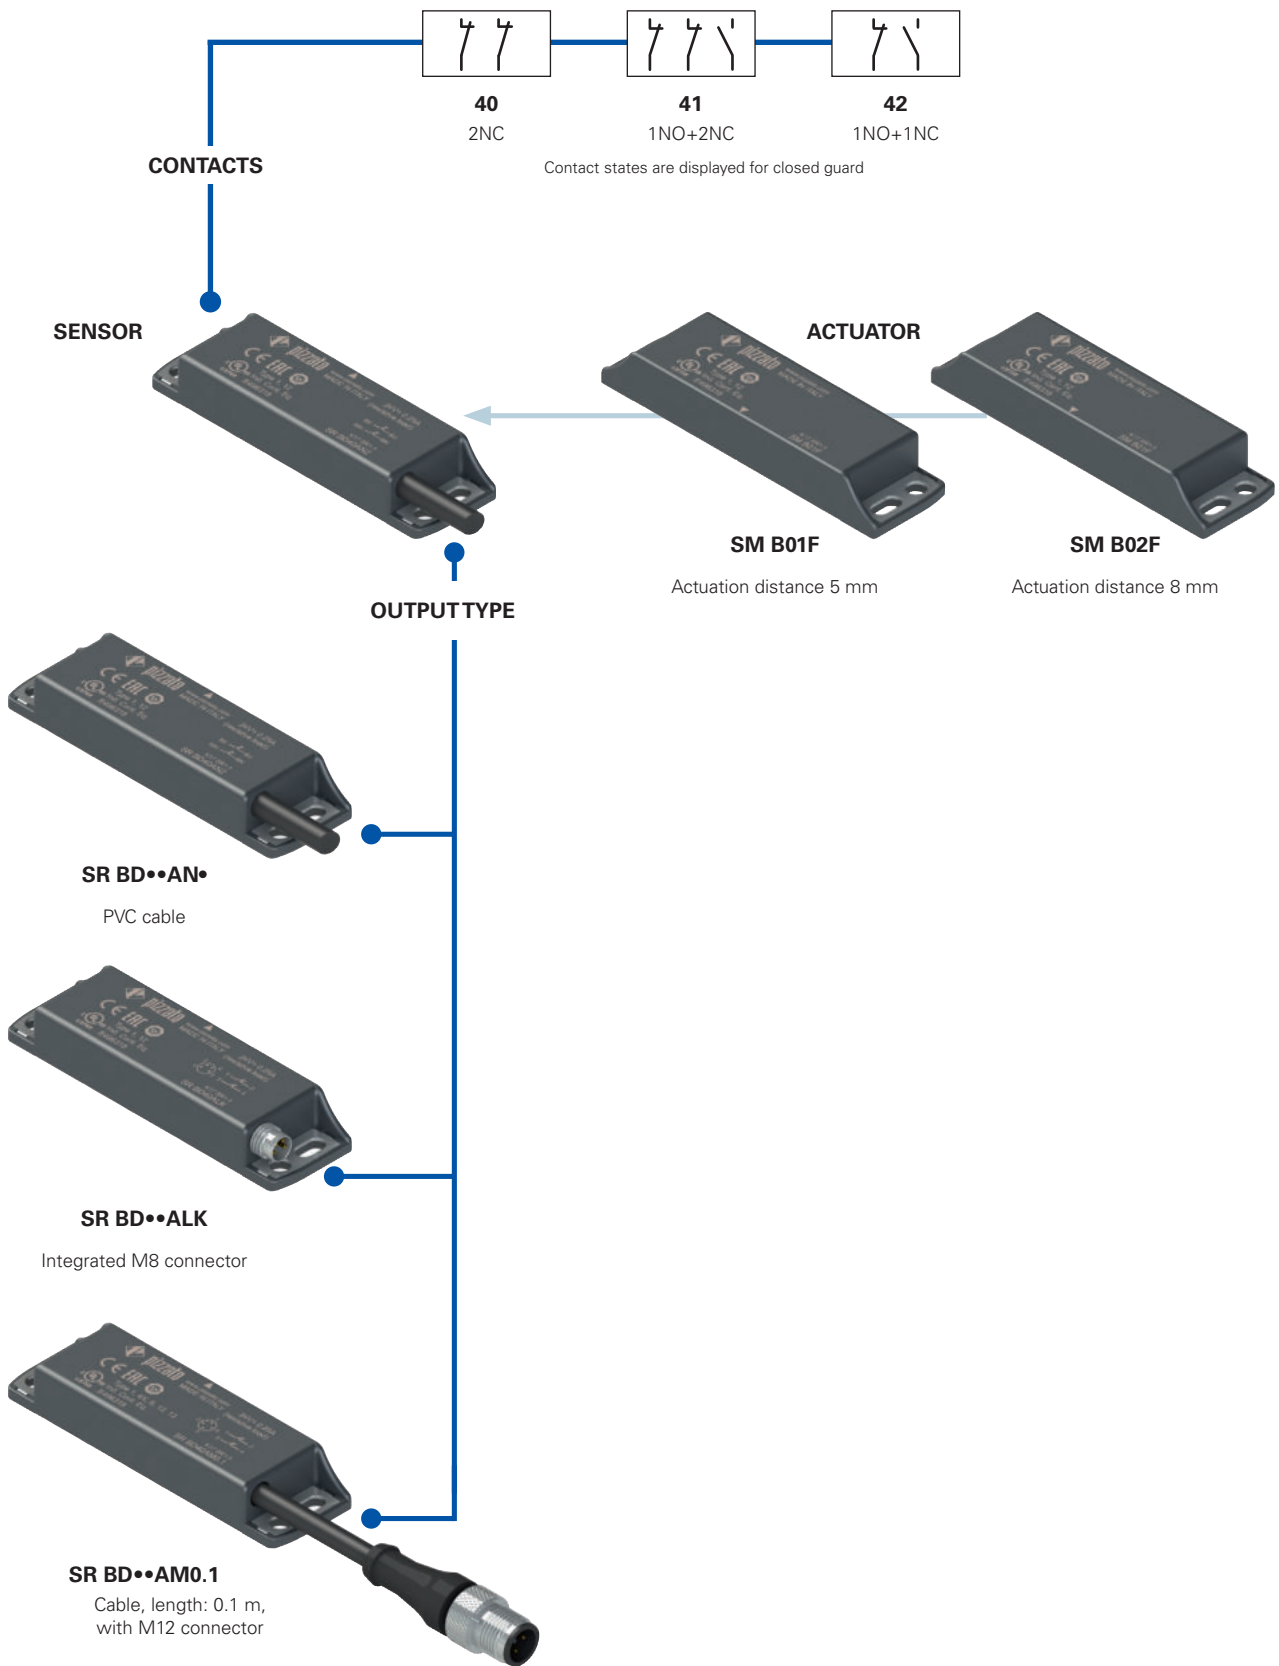


## Code structure for sensor with actuator

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

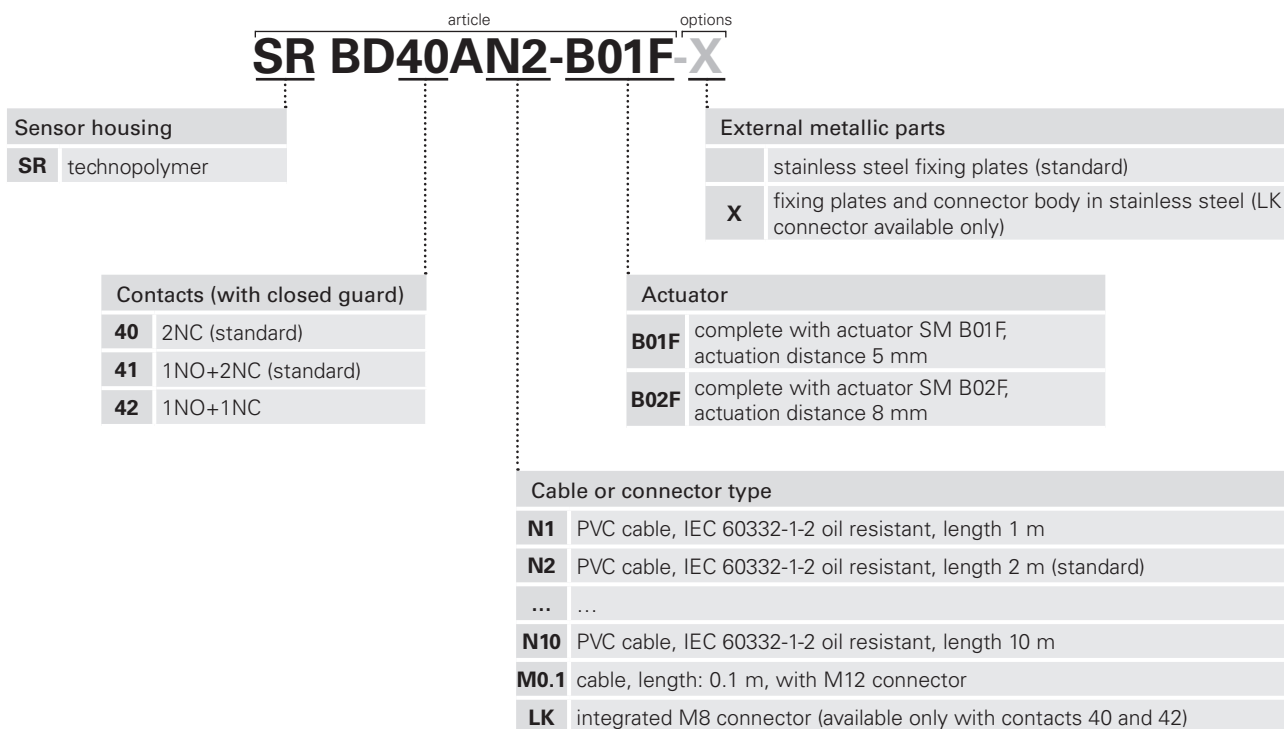

## Code structure for single sensor

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

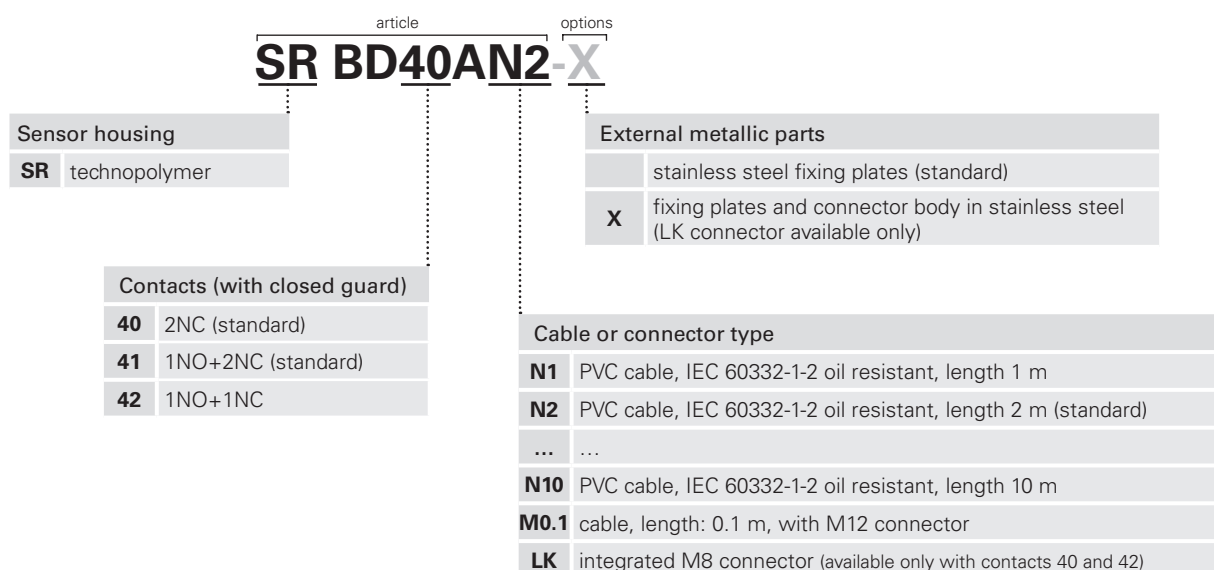

## Code structure for single actuator

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

## SM B01F

<b>Actuator</b>	
<b>B01F</b>	actuation distance 5 mm
<b>B02F</b>	actuation distance 8 mm



### Main features

- Actuation without mechanical contact
- Stainless steel fixing plates
- Output contacts: 2NC, 1NO+2NC or 1NO+1NC
- Insensitive to dirt
- Protection degrees IP67 and IP69K
- Coded actuator
- Technopolymer housing
- Versions with M8 or M12 connector

### Quality marks:



UL approval: E496318  
 TÜV SÜD approval: Z10 18 05 75157 024  
 EAC approval: RU C-IT.YT03.B.00035/19

### Compliance with the requirements of:

Machinery Directive 2006/42/EC,  
 EMC Directive 2014/30/EU,  
 RoHS Directive 2011/65/EU.

### Technical data

#### Housing

Housing made of glass fibre reinforced technopolymer, self-extinguishing.  
 Versions with integrated cable 4 x 0.34 mm<sup>2</sup> or 6 x 0.25 mm<sup>2</sup>, length 2 m, other lengths from 0.5 m ... 10 m on request  
 Versions with integrated M8 connector  
 Versions with 0.1 m cable length and M12 connector, other lengths from 0.1 ... 3 m on request

Protection degree: IP67 acc. to EN 60529  
 IP69K acc. to ISO 20653  
 (Protect the cables from direct high-pressure and high-temperature jets)

#### General data

SIL (SIL CL) up to: SIL 3 acc. to EN 62061  
 Performance Level (PL) up to: PL e acc. to EN ISO 13849-1  
 Safety category up to: cat. 4 acc. to EN ISO 13849-1  
 Interlock, no contact, coded: type 4 acc. to EN ISO 14119  
 Coding level: low acc. to EN ISO 14119  
 Safety parameter B<sub>10D</sub>: 20,000,000 (with compatible Pizzato Elettrica safety modules)  
 400,000 (at max. load: DC12 24 V 250 mA)  
 Mission time: 20 years  
 Ambient temperature: -25°C ... +80°C  
 Ambient temp. with flexible installation cable: -5°C ... +80°C  
 Vibration resistance: 10 gn (10 ... 150 Hz) acc. to IEC 60068-2-6  
 Shock resistance: 30 gn; 11 ms acc. to EN 60068-2-27  
 Pollution degree: 3  
 Screw tightening torque: 0.8 ... 2 Nm

#### In compliance with standards:

IEC 60947-1, IEC 60947-5-1, IEC 60947-5-2, IEC 60947-5-3 (in abbinamento con un modulo di sicurezza), EN ISO 14119, EN ISO 12100, EN ISO 13849-1, EN ISO 13849-2, IEC 62061, IEC 60204-1, IEC 60529, IEC 61508-1, IEC 61508-2, IEC 61508-4, EN IEC 63000, ISO 20653, UL 508, CSA C22.2 No. 14.

#### Approvals:

UL 508, CSA C22.2 No. 14, EN ISO 13849-1, EN 60947-5-3, EN 61508-1, EN 61508-2, EN 61508-4, EN 62061, EN 60947-1.

#### Actuation data

Assured operating distance S<sub>ao</sub>: 5 mm with actuator SM B01F  
 8 mm with actuator SM B02F  
 Assured release distance S<sub>ar</sub>: 15 mm with actuator SM B01F  
 20 mm with actuator SM B02F  
 Repeat accuracy: ≤ 10%  
 Switching frequency: up to 1 Hz  
 Distance between two sensors: min. 50 mm

#### Electrical data

Rated operating voltage U<sub>e</sub>: 24 Vac/dc  
 Rated operating current I<sub>e</sub>: 0.25 A (resistive load)  
 Rated insulation voltage U<sub>i</sub>: 120 Vac (with cable)  
 50 Vac / 75 Vdc (with M8 connector)  
 120 Vac (with M12 connector, 4-pole)  
 30 Vac / 36 Vdc (with M12 connector, 8-pole)  
 Rated impulse withstand voltage (U<sub>imp</sub>): 6 kV  
 1.5 kV (with connector)  
 Thermal current I<sub>th</sub>: 0.25 A  
 Maximum switching load: 6 W (resistive load)  
 Protection fuse: 0.25 A type F  
 Electrical endurance: 1 million operating cycles  
 Rated conditional short-circuit current: 100 A

**⚠ If not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 439 to 454.**

### Connection with safety modules for safety applications:

Connection with safety modules CS AR-01••••; CS AR-02••••; CS AR-04••••; CS AR-05••••; CS AR-06••••; CS AR-08••••; CS AR-46•024; CS AR-91••••; CS AT-0••••; CS AT-1••••; CS AT-3••••; CS FS-5••••; CS MF••••••; CS MP••••••.  
 When connected to the safety module, the sensor can be classified as a control circuit device up to PDF-M (EN 60947-5-3).  
 The system can be used in safety circuits up to PL e/SIL 3/category 4 in accordance with EN ISO 13849-1.

### Features approved by UL

Electrical Ratings: 24 Vdc, 0,25 A (resistive load)  
 Environmental Ratings: Types 1, 4X, 6, 12, 13  
 Accessory for series SR for actuator switch series SM B.

### Features approved by TÜV SÜD

Supply voltage: 24 Vac/dc  
 Rated operating current (max.): 0.25 A  
 Ambient temperature: -25°C ... +80°C  
 Protection degree: IP67  
 PL, category: PL e, cat. 4. with CS AR-08

In compliance with standards: 2006/42/EC Machinery Directive, EN ISO 13849-1:2015 (Cat. 4, PL e), EN 60947-5-3:2013, EN ISO 14119:2013, EN 61508-1:2010 (SIL 3), EN 61508-2:2010 (SIL 3), EN 61508-4:2010 (SIL 3), EN 62061:2005/A2:2015 (SIL CL 3)

Please contact our technical department for the list of approved products.

Please contact our technical department for the list of approved products.




### Description



Coded magnetic sensors are devices suitable for monitoring protections and guards of machines without inertia which, when linked to a safety module, can create a system with safety category up to SIL 3 according to EN 62061, up to PL e according to EN ISO 13849-1 and up to category 4 according to EN ISO 13849-1.


These products consist of a sensor that detects the magnetic field and which is connected to the machine structure and of a coded magnetic actuator, which is connected to the movable guard. When the sensor and actuator are approached (closed guard), the sensor detects the actuator and actuates the electrical contacts. The sensor is designed to be activated only by the correct coded actuator and not through a common magnet.

### Insensitivity to dirt



Magnetic sensors are totally sealed and retain their safety characteristics also where dirt and dust are present (not ferromagnetic material). This characteristic, combined with the design without recesses, makes them particularly suitable for use in the food industry.

### Wide actuation range




With their built-in features, magnetic sensors have a wide actuation range, making them very well suited for applications with large tolerances or where mechanical properties change over time.


In this type of sensor, the actuation distances may vary depending on the shift direction of the actuator in relation to the sensor.

### Actuation from many directions

The coded magnetic sensors were designed to be activated by the respective actuator from various directions. The customer therefore enjoys maximum flexibility when positioning devices along the perimeter of the guards.

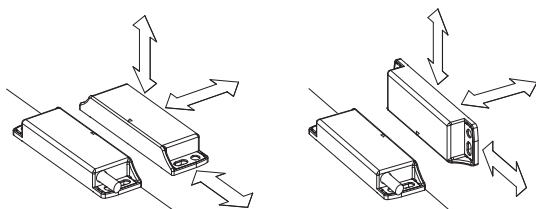


### Stainless steel fixing plates




To prevent damage to the fixing slots when fastening on non-perfectly flat surfaces, coded magnetic sensors are equipped with stainless steel fixing plates. Even in the presence of suitable fixing surfaces, this solution makes the sensor more robust against mechanical stresses.

### Assembly of multiple sensor-actuator systems

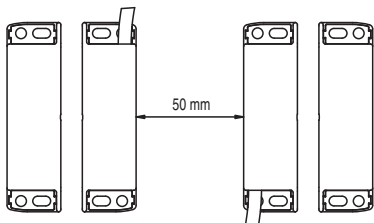

It is possible to install more than one device on the same machine. The minimum mounting distance between sensor-actuator systems is only 50 mm.

### Safety screws for actuators



As required by EN ISO 14119, the actuator must be fixed immovably to the door frame. Pan head safety screws with one-way fitting are available for this purpose. With this screw type, the actuators cannot be removed or tampered by using common tools. See accessories on page 419.

### Laser engraving



All devices are marked using a dedicated indelible laser system. These engravings are therefore suitable for extreme environments too. Thanks to this system that does not use labels, the loss of plate data is prevented and a greater resistance of the marking is achieved over time.

### Series connection of multiple sensors

The coded magnetic sensors can be connected in series with the only limitation that the overall resistance, of sensors and the related wiring, has to be not higher than the admitted max. value of the module, which typically is equal to 50 ohm (see module features). This is a very high value that, with normal wiring, allows the use of dozens of sensors without problems. It is also possible to realise mixed circuit solutions by connecting coded magnetic sensors in series to safety switches, with the only limitation being the above-mentioned maximum electrical resistance.


It should be noted that the series connection of two or more coded sensors reduces the self-monitoring capacity of the system, see ISO/TR 24119.

The use of Pizzato Elettrica safety modules is recommended.

### Protection degrees IP67 and IP69K

# IP69K IP67


These devices are designed to be used under the toughest environmental conditions, and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where the maximum degree of protection is required for the housing. Due to their special design, these devices are suitable for use in equipment subjected to cleaning with high pressure hot water jets. These devices meet the IP69K test requirements according to ISO 20653 (water jets with 100 bar and 80°C).

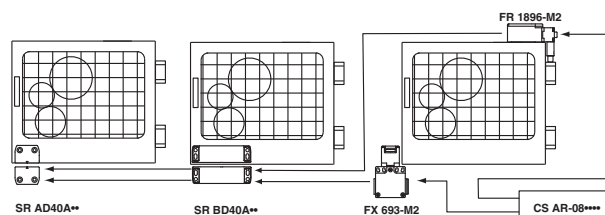

## Internal connections with cable

Contact states are displayed for closed guard


With cable (2NC)



With cable (1NO+1NC)




With cable (1NO+2NC)




## Internal connections with connector

Contact states are displayed for closed guard


With M12 connector (1NO+2NC)




With M12 connector (2NC)




With M12 connector (1NO+1NC)



With M8 connector (2NC)



With M8 connector (1NO+1NC)



For female connectors, see page 419.


## Connection with safety modules

A coded magnetic sensor alone cannot be used for safety functions because its operating principles are not considered safe by the standards (e.g. positive opening on mechanical switches). For this reason, a magnetic sensor coded for use in safety applications must always be connected to a safety module that monitors its proper operation through a circuit with at least two channels.

## Compatible safety modules

The magnetic sensors have been tested and approved for operation with suitable safety modules (see list).

The use of complete and tested solutions guarantees the electrical compatibility between the sensor and safety module, as well as high reliability.

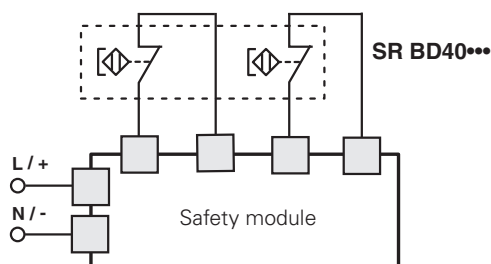

Sensors	Compatible safety modules	Safety module output contacts	
		Instantaneous contacts	Delayed contacts
SR BD40A... SR BD41A... SR BD42A... <sup>a</sup>	CS AR-01•••• <sup>b</sup>	2NO+1NC	/
	CS AR-02•••• <sup>b</sup>	3NO	/
	CS AR-04•••• <sup>b</sup>	3NO+1NC	/
	CS AR-05••••	3NO+1NC	/
	CS AR-06••••	3NO+1NC	/
	CS AR-08••••	2NO	/
	CS AR-46•024	1NO	/
	CS AR-91••••	2NO+1PNP	/
	CS AR-94••••	2NO	/
	CS AR-95••••	2NO	/
	CS AT-0•••••	2NO+1NC	2NO
	CS AT-1•••••	3NO	2NO
	CS AT-3•••••	2NO	1NO
	CS FS-5•••••	1NO+1NC+1CO	/
	CS MP•••••••	see page 369	see page 369
	CS MF•••••••	see page 401	see page 401


<sup>a</sup> Compatible with CS MF202••-P4 and CS MP••••••• only.

<sup>b</sup> Compatible with modules with production batch later than 06/2014 only. For features of the safety modules see page 305.

## Connection with safety modules CS AR-05 or CS AR-06

Input configuration with manual start (CS AR-05) and monitored start (CS AR-06)


2 channels

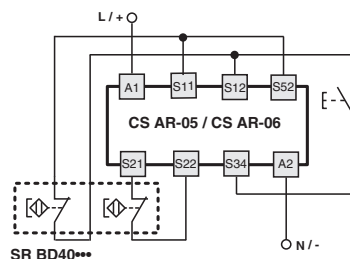

## Connection with safety modules CS AR-08 or CS AT

Input configuration with manual start



2 channels

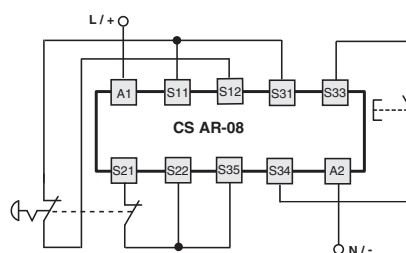



For features of the safety modules see page 305.



### Operating distances SR BD.....-B01F

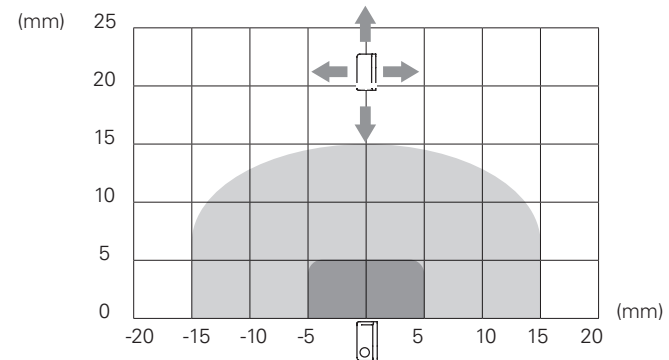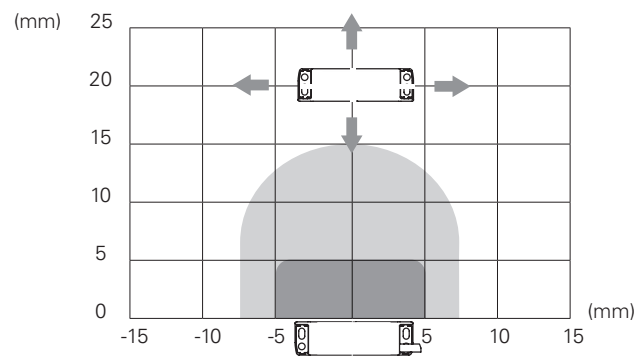

### Operating distances SR BD.....-B02F

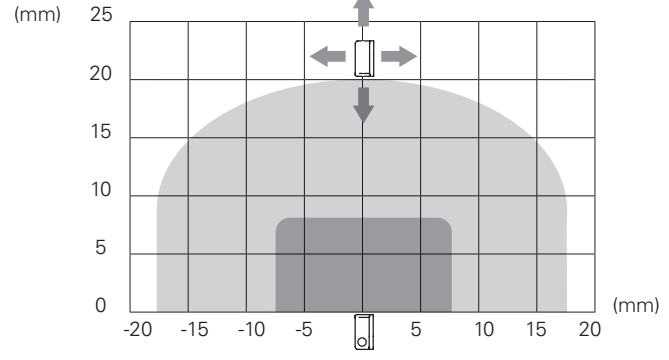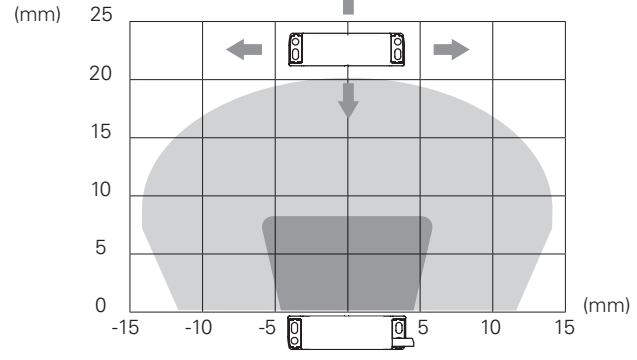


Legend:  
 ■ Assured operating distance  $S_{ao}$     ■ Assured release distance  $S_{ar}$   
**Note:** The progress of the activation areas is for reference only

### Dimensional drawings


Integrated cable, length: 2 m		M8 connector		Cable, length: 0.1 m, with M12 connector		coded actuator Low level of coding acc. to EN ISO 14119	
SR BD40AN2	2NC	SR BD40ALK	2NC	SR BD40AM0.1	2NC	SM B01F	Actuation distance 5 mm
SR BD41AN2	1NO+2NC	/		SR BD41AM0.1	1NO+2NC	SM B02F	Actuation distance 8 mm
SR BD42AN2	1NO+1NC	SR BD42ALK	1NO+1NC	SR BD42AM0.1	1NO+1NC		

### Accessories

#### Spacer

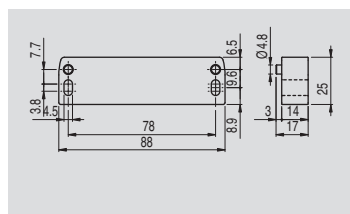


If possible do not mount the sensor and the actuator on ferromagnetic materials.  
 This spacer is placed between the magnetic safety sensors and metal surfaces that can deflect the magnetic field: as a result, the activation and deactivation distances of the sensor remain the same.  
 Because it is made out of a single block of material, it is especially well suited for applications where a high level of cleanliness is required, as any material present in the installation area cannot penetrate and accumulate.



Article	Description
VS SP1BA1	Technopolymer spacer for SR B series sensors

Selection diagram

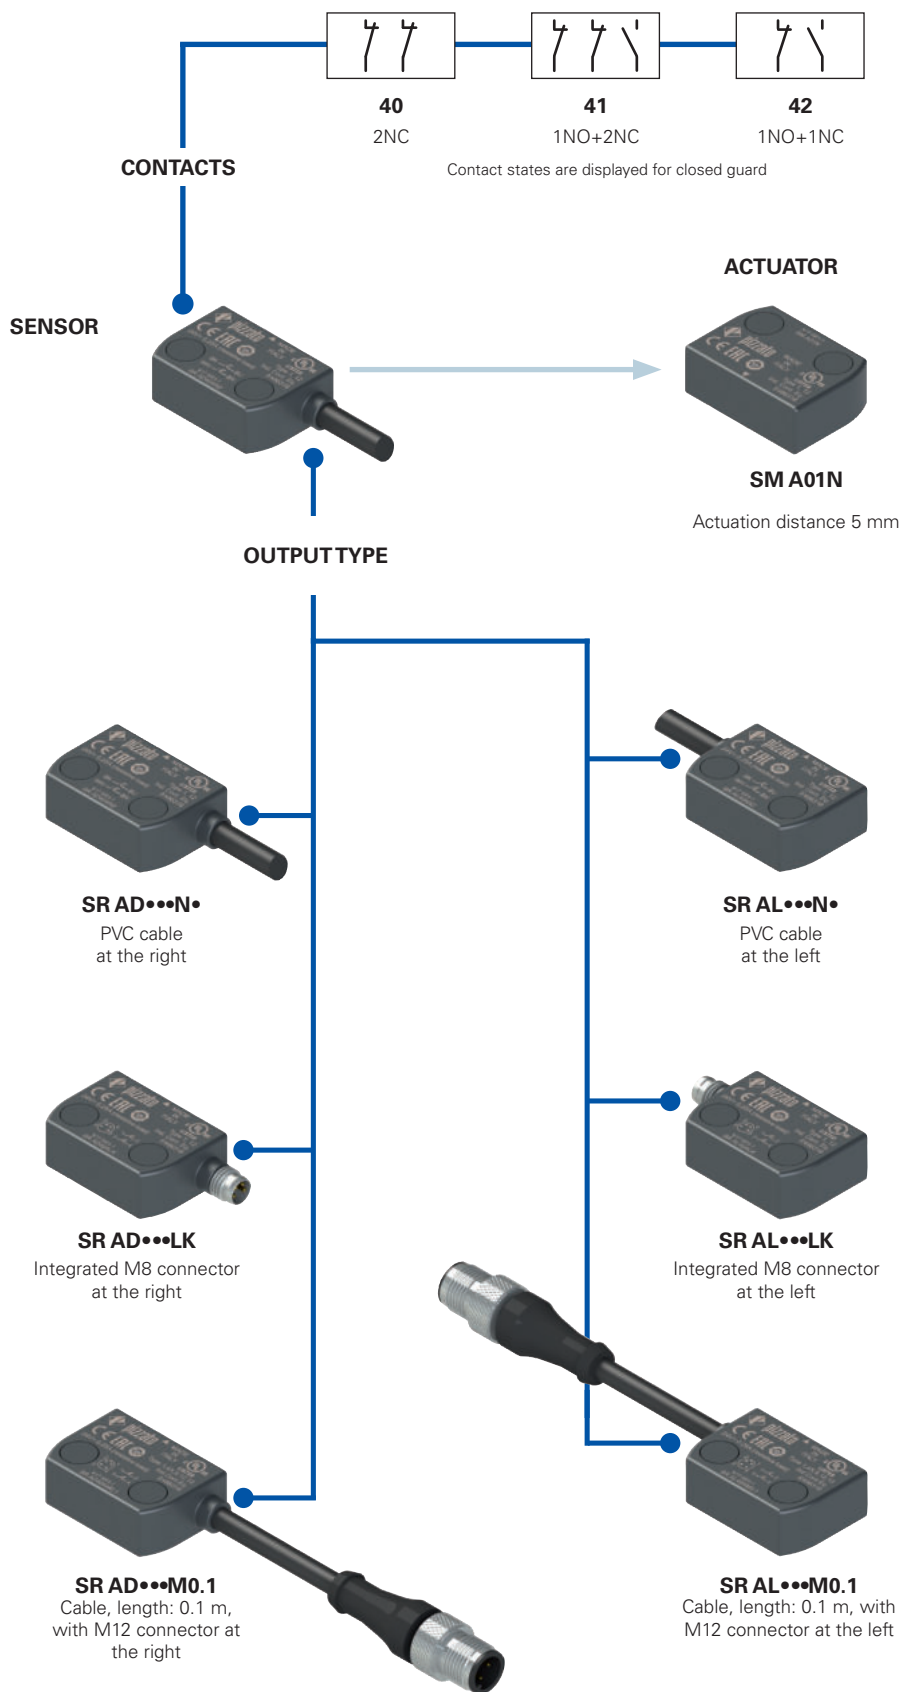


● product option  
→ Sold separately as accessory




## Code structure for sensor with actuator

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

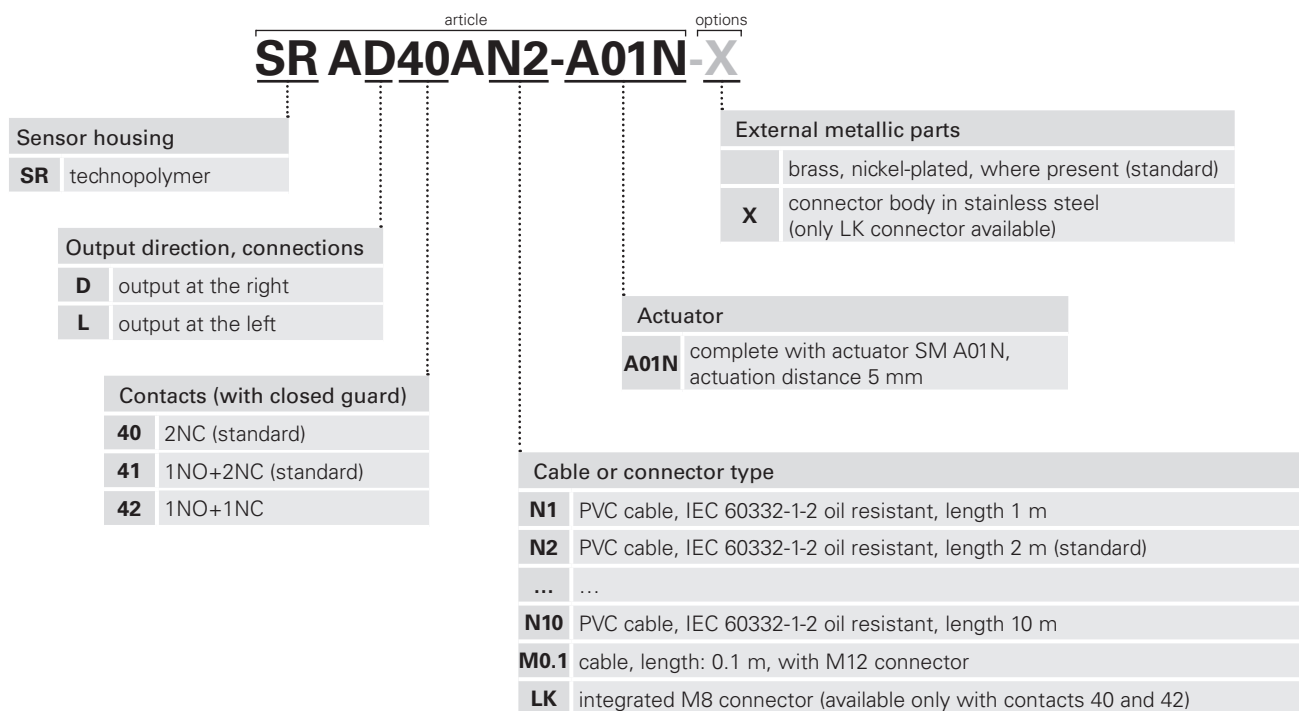

## Code structure for single sensor

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

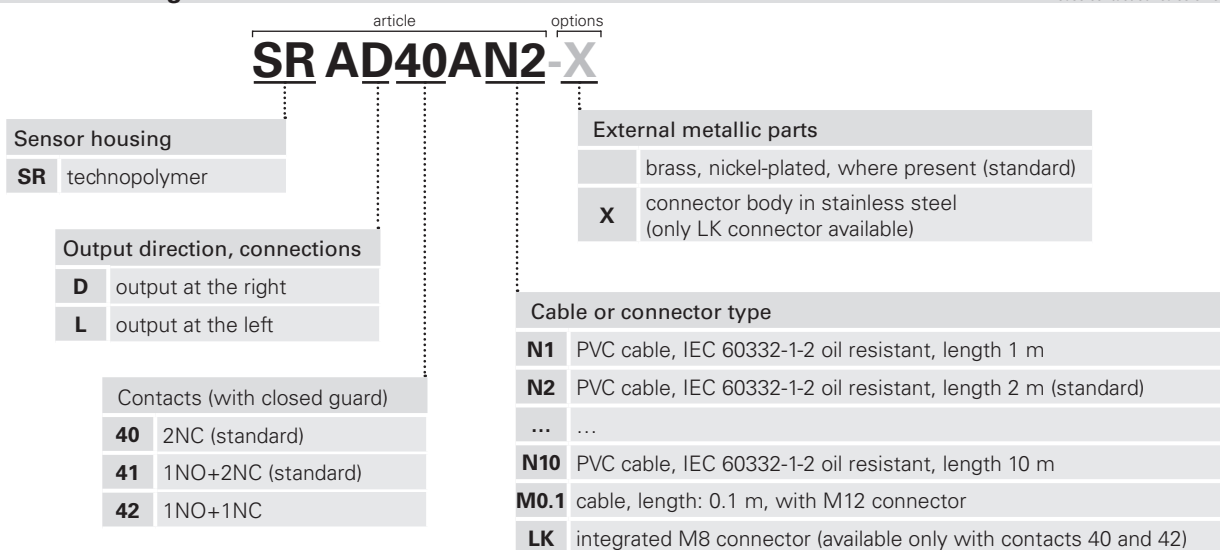

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

## Code structure for single actuator

## SM A01N

<b>Actuator</b>	
<b>A01N</b>	actuation distance 5 mm





### Main features

- Actuation without mechanical contact
- Output contacts: 2NC, 1NO+2NC or 1NO+1NC
- Insensitive to dirt
- Protection degrees IP67 and IP69K
- Coded actuator
- Technopolymer housing
- Versions with M8 or M12 connector

### Quality marks:



UL approval: E496318  
 TÜV SÜD approval: Z10 18 05 75157 024  
 EAC approval: RU C-IT.VT03.B.00035/19

### Compliance with the requirements of:

Machinery Directive 2006/42/EC,  
 EMC Directive 2014/30/EU,  
 RoHS Directive 2011/65/EU.

### Technical data

#### Housing

Housing made of glass fibre reinforced technopolymer, self-extinguishing.  
 Versions with integrated cable 4 x 0.34 mm<sup>2</sup> or 6 x 0.25 mm<sup>2</sup>, length 2 m, other lengths from 0.5 m ... 10 m on request.  
 Versions with integrated M8 connector.  
 Versions with 0.1 m cable length and M12 connector, other lengths from 0.1 ... 3 m on request

Protection degree: IP67 acc. to EN 60529  
 IP69K acc. to ISO 20653  
 (Protect the cables from direct high-pressure and high-temperature jets)

#### General data

SIL (SIL CL) up to: SIL 3 acc. to EN 62061  
 Performance Level (PL) up to: PL e acc. to EN ISO 13849-1  
 Safety category up to: cat. 4 acc. to EN ISO 13849-1  
 Interlock, no contact, coded: type 4 acc. to EN ISO 14119  
 Coding level: low acc. to EN ISO 14119  
 Safety parameter B<sub>10D</sub>: 20,000,000 (used with Pizzato safety modules)

400,000  
 (used with max load: DC12 24 V 0.25 A)  
 20 years  
 Ambient temperature: -25°C ... +80°C  
 Ambient temperature with flexible installation cable: -5°C ... +80°C  
 Vibration resistance: 10 gn (10 ... 150 Hz) acc. to IEC 60068-2-6  
 Shock resistance: 30 gn; 11 ms acc. to EN 60068-2-27  
 Pollution degree: 3  
 Screw tightening torque: 0.8 ... 2 Nm

#### In compliance with standards:

IEC 60947-1:2007, IEC 60947-5-1, IEC 60947-5-2, IEC 60947-5-3 (in abbinamento con un modulo di sicurezza), EN ISO 14119, EN ISO 12100, EN ISO 13849-1, EN ISO 13849-2, IEC 62061, IEC 60204-1, IEC 60529, IEC 61508-1, EN 61508-2, IEC 61508-4, EN IEC 63000, ISO 20653, UL 508, CSA C22.2 No. 14.

#### Approvals:

UL 508, CSA C22.2 No. 14, EN ISO 13849-1, EN 60947-5-3, EN 61508-1, EN 61508-2, EN 61508-4, EN 62061, EN 60947-1.

#### Actuation data

Assured operating distance S<sub>ao</sub>: 5 mm with actuator SM A01N  
 Assured release distance S<sub>ar</sub>: 15 mm with actuator SM A01N  
 Repeat accuracy: ≤ 10%  
 Switching frequency: up to 1 Hz  
 Distance between two sensors: minimum 50 mm

#### Electrical data

Rated operating voltage U<sub>e</sub>: 24 Vac/dc  
 Rated operating current I<sub>e</sub>: 0.25 A (resistive load)  
 Rated insulation voltage U<sub>i</sub>: 120 Vac (with cable)  
 50 Vac / 75 Vdc (with M8 connector)  
 120 Vac (with M12 connector, 4-pole)  
 30 Vac / 36 Vdc (with M12 connector, 8-pole)  
 Rated impulse withstand voltage (U<sub>imp</sub>): 6 kV / 1.5 kV (with connector)  
 Thermal current I<sub>th</sub>: 0.25 A  
 Maximum switching load: 6 W (resistive load)  
 Protection fuse: 0.25 A type F  
 Electrical endurance: 1 million operating cycles  
 Rated conditional short-circuit current: 100 A

**⚠ If not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 439 to 454.**

### Connection with safety modules for safety applications:

Connection with safety modules CS AR-01●●●●; CS AR-02●●●●; CS AR-04●●●●; CS AR-05●●●●; CS AR-06●●●●; CS AR-08●●●●; CS AR-46●024; CS AR-91●●●●; CS AT-0●●●●; CS AT-1●●●●; CS AT-3●●●●; CS FS-5●●●●; CS MF●●●●●●●●; CS MP●●●●●●●●.  
 When connected to the safety module, the sensor can be classified as a control circuit device up to PDF-M (EN 60947-5-3).  
 The system can be used in safety circuits up to PL e/SIL 3/category 4 in accordance with EN ISO 13849-1.

### Features approved by UL

Electrical Ratings: 24 Vdc, 0,25 A (resistive load)  
 Environmental Ratings: Types 1, 4X, 6, 12, 13  
 Accessory for series SR for actuator switch series SM A.

### Features approved by TÜV SÜD

Supply voltage: 24 Vac/dc  
 Rated operating current (max.): 0.25 A  
 Ambient temperature: -25°C ... +80°C  
 Protection degree: IP67  
 PL, category: PL e, cat. 4. with CS AR-08

In compliance with standards: 2006/42/EC Machinery Directive, EN ISO 13849-1:2015 (Cat. 4, PL e), EN 60947-5-3:2013, EN ISO 14119:2013, EN 61508-1:2010 (SIL 3), EN 61508-2:2010 (SIL 3), EN 61508-4:2010 (SIL 3), EN 62061:2005/A2:2015 (SIL CL 3)

Please contact our technical department for the list of approved products.


Please contact our technical department for the list of approved products.

## Description



Coded magnetic sensors are devices suitable for monitoring protections and guards of machines without inertia which, when linked to a safety module, can create a system with safety category up to SIL 3 according to EN 62061, up to PL e according to EN ISO 13849-1 and up to category 4 according to EN ISO 13849-1. These products consist of a sensor that detects the magnetic field and which is connected to the machine structure and of a coded magnetic actuator, which is connected to the movable guard. When the sensor and actuator are approached (closed guard), the sensor detects the actuator and actuates the electrical contacts. The sensor is designed to be activated only by the correct coded actuator and not through a common magnet.


## Insensitivity to dirt



Magnetic sensors are totally sealed and retain their safety characteristics also where dirt and dust are present (not ferromagnetic material).

This characteristic, combined with the design without recesses, makes them particularly suitable for use in the food industry.


## Wide actuation range



With their built-in features, magnetic sensors have a wide actuation range, making them very well suited for applications with large tolerances or where mechanical properties change over time.


In this type of sensor, the actuation distances may vary depending on the shift direction of the actuator in relation to the sensor.

## Protection against tampering



Each sensor and actuator of the SR A series is supplied complete with snap-on protection caps to be applied on the holes of the fixing screws. Not only do the caps prevent dirt from accumulating and simplify cleaning, they also block access to the fastening screws of the actuator. As a result, standard screws can be used instead of tamper-proof screws.


## Actuation from many directions



The coded magnetic sensors were designed to be activated by the respective actuator from various directions.


The customer therefore enjoys maximum flexibility when positioning devices along the perimeter of the guards.

## Laser engraving



All devices are marked using a dedicated indelible laser system. These engravings are therefore suitable for extreme environments too. Thanks to this system that does not use labels, the loss of plate data is prevented and a greater resistance of the marking is achieved over time.

## Assembly of multiple sensor-actuator systems



It is possible to install more than one device on the same machine. The minimum mounting distance between sensor-actuator systems is only 50 mm.

## Protection degrees IP67 and IP69K




These devices are designed to be used under the toughest environmental conditions, and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where the maximum degree of protection is required for the housing. Due to

their special design, these devices are suitable for use in equipment subjected to cleaning with high pressure hot water jets. These devices meet the IP69K test requirements according to ISO 20653 (water jets with 100 bar and 80°C).

## Series connection of multiple sensors


The coded magnetic sensors can be connected in series with the only limitation that the overall resistance, of sensors and the related wiring, has to be not higher than the admitted max. value of the module, which typically is equal to 50 Ω (see module features). This is a very high value that, with normal wiring, allows the use of dozens of sensors without problems. It is also possible to realise mixed circuit solutions by connecting coded magnetic sensors in series to safety switches, with the only limitation being the above-mentioned maximum electrical resistance.

It should be noted that the series connection of two or more coded sensors reduces the self-monitoring capacity of the system, see ISO/TR 24119. The use of Pizzato Elettrica safety modules is recommended.

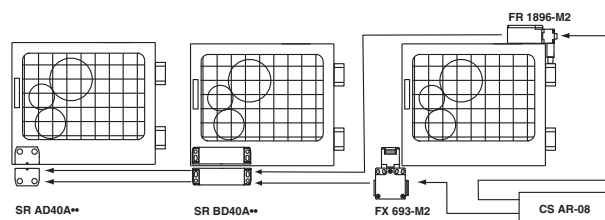


## Internal connections with cable

Contact states are displayed for closed guard

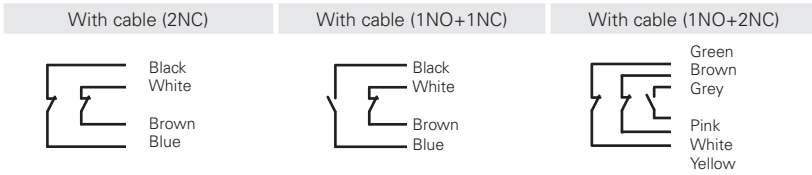

## Internal connections with connector

Contact states are displayed for closed guard

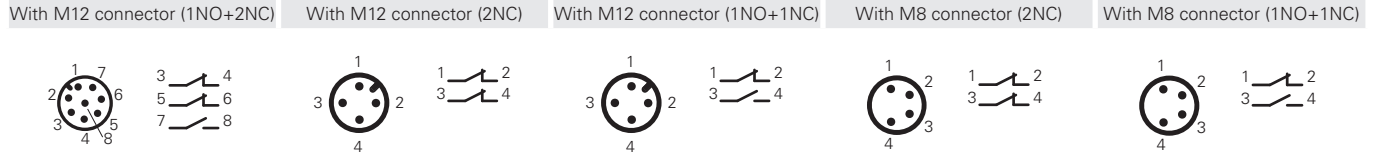

For female connectors, see page 419

## Connection with safety modules


A coded magnetic sensor alone cannot be used for safety functions because its operating principles are not considered safe by the standards (e.g. the positive opening on mechanical switches).

For this reason, a magnetic sensor coded for use in safety applications must always be connected to a safety module with at least two channels that monitors the proper function.

## Compatible safety modules

The magnetic sensors have been tested and approved for operation with suitable safety modules (see list).

The use of complete and tested solutions guarantees the electrical compatibility between the sensor and safety module, as well as high reliability.

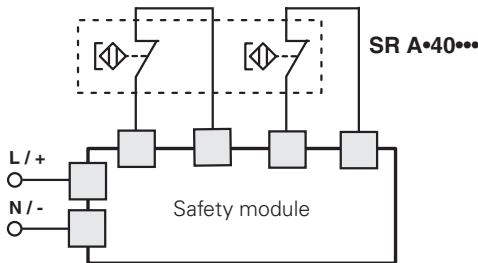

Sensors	Compatible safety modules	Safety module output contacts	
		Instantaneous contacts	Delayed contacts
SR AD40A●● SR AD41A●● SR AD42A●● <sup>a</sup>	CS AR-01●●●● <sup>b</sup>	2NO+1NC	/
	CS AR-02●●●● <sup>b</sup>	3NO	/
	CS AR-04●●●● <sup>b</sup>	3NO+1NC	/
	CS AR-05●●●●	3NO+1NC	/
	CS AR-06●●●●	3NO+1NC	/
	CS AR-08●●●●	2NO	/
	CS AR-46●024	1NO	/
	CS AR-91●●●●	2NO+1PNP	/
	CS AR-94●●●●	2NO	/
	CS AR-95●●●●	2NO	/
	CS AT-0●●●●●	2NO+1NC	2NO
	CS AT-1●●●●●	3NO	2NO
	CS AT-3●●●●●	2NO	1NO
	CS FS-5●●●●●	1NO+1NC+1CO	/
	CS MP●●●●●●●●	see page 369	see page 369
	CS MF●●●●●●●●	see page 401	see page 401


<sup>a</sup> Compatible with CS MF202●●-P4 and CS MP●●●●●●●● only.

<sup>b</sup> Compatible with modules with production batch later than 06/2014 only. For features of the safety modules see page 305.

### Connection with safety modules CS AR-05 or CS AR-06

Input configuration with manual start (CS AR-05) and monitored start (CS AR-06)


2 channels



### Connection with safety modules CS AR-08 or CS AT

Input configuration with manual start



2 channels

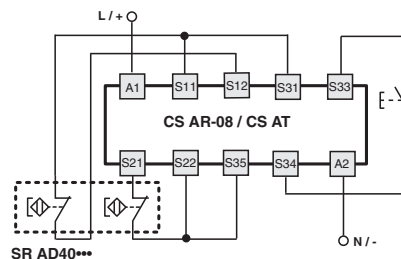

For features of the safety modules see page 305.



### Operating distances SR AD.....A01N

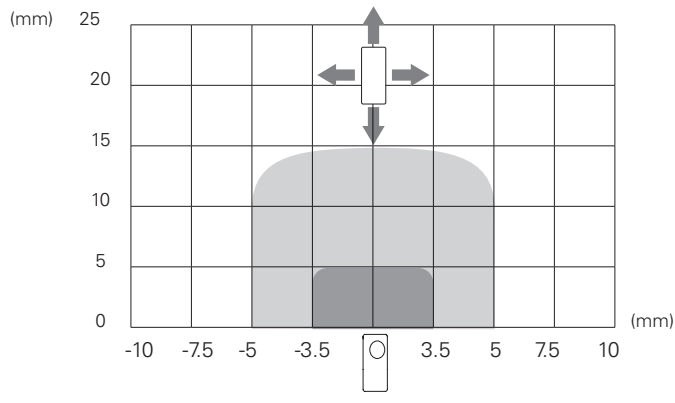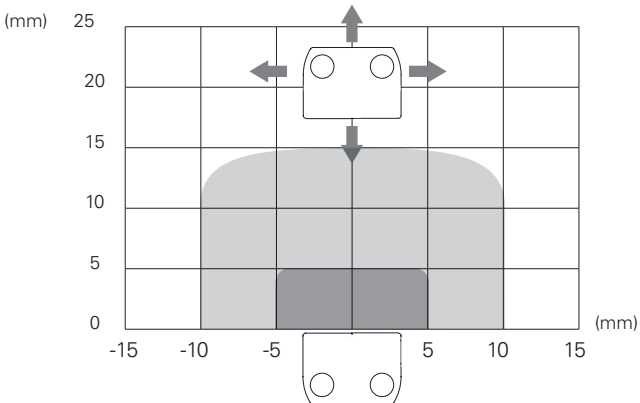

Legend:

- Assured operating distance  $S_{ao}$
- Assured release distance  $S_{ar}$

Note: The progress of the activation areas is for reference only

### Dimensional drawings


Integrated cable, length: 2 m, at the right		Integrated cable, length: 2 m, at the left	
SR AD40AN2	2NC	SR AL40AN2	2NC
SR AD41AN2	1NO+2NC	SR AL41AN2	1NO+2NC
SR AD42AN2	1NO+1NC	SR AL42AN2	1NO+1NC

coded actuator Low level of coding acc. to EN ISO 14119	
SM A01N	Actuation distance 5 mm


M8 connector, at the right	M8 connector, at the left	Cable, length: 0.1 m, with M12 connector at the right	Cable, length: 0.1 m, with M12 connector at the left
SR AD40ALK	2NC	SR AD40AM0.1	2NC
/	/	SR AD41AM0.1	1NO+2NC
SR AD42ALK	1NO+1NC	SR AD42AM0.1	1NO+1NC
		SR AL40AM0.1	2NC
		SR AL41AM0.1	1NO+2NC
		SR AL42AM0.1	1NO+1NC

### Accessories

#### Spacer



If possible do not mount the sensor and the actuator on ferromagnetic materials. This spacer is placed between the magnetic safety sensors and metal surfaces that can deflect the magnetic field: as a result, the activation and deactivation distances of the sensor remain the same. Because it is made out of a single block of material, it is especially well suited for applications where a high level of cleanliness is required, as any material present in the installation area cannot penetrate and accumulate.



Article	Description
VS SP1AA1	Technopolymer spacer for SR A series sensors

All values in the drawings are in mm

Accessories See page 419

The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)

## Introduction



In combination with the corresponding safety modules, the sensors of the ST D series are suitable for the monitoring of protective devices on machines without inertia and allow the system in which they are used to reach a safety category up to SIL 3 acc. to EN 62061 as well as up to PL e and Category 4 acc. to EN ISO 13849-1. These sensors use RFID (Radio Frequency IDentification) technology and provide high protection against possible manipulation thanks to the uniqueness of the codes transmitted by the actuator. Because they have no mechanical elements, they guarantee a long service life even in applications with frequent operating cycles and under harsh environmental conditions.

## Maximum safety with a single device


**PL e + SIL 3** The sensors of the ST D series are constructed with redundant electronics. As a result, the maximum PL e and SIL 3 safety levels can still be achieved through the use of a single device on a guard. This avoids expensive wiring in the field and allows faster installation. Inside the control cabinet, the two electronic safety outputs must be connected to a module suitable for managing devices with solid state outputs, or to a safety PLC.

## Series connection of multiple sensors

**PL e + SIL 3** One of the most important features of the ST D series from Pizzato Elettrica is the possibility of connecting up to 32 sensors in series, while still maintaining the maximum safety level (PL e) laid down in EN 13849-1.


This connection type is permissible in safety systems which have a safety module at the end of the chain that monitors the outputs of the last ST sensor.

The fact that the PL e safety level can be maintained even with 32 sensors connected in series demonstrates the extremely secure structure of each sensor of the ST series.

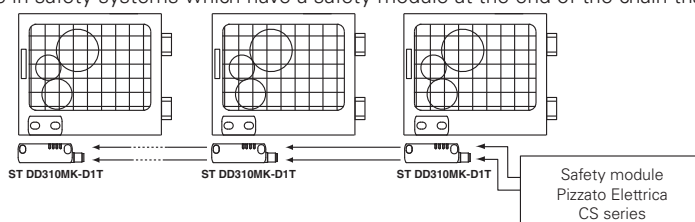

## Series connection with other devices

**PL e + SIL 3** The ST D series features two safety inputs and two safety outputs, which can be connected in series with other Pizzato Elettrica safety devices. This option allows the creation of safety chains containing various devices. For example, stainless steel safety hinges (HX BEE1 series), transponder sensors (ST series) and door lock sensors (NG or NS series) can be connected in series while still maintaining the maximum PL e and SIL 3 safety levels.

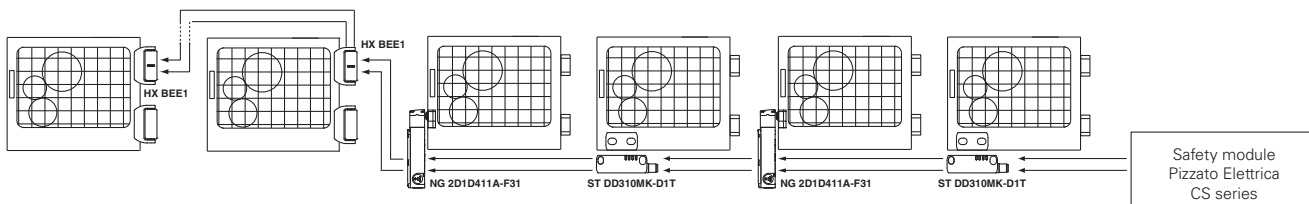

## High level coded actuators



The ST D series is provided with an electronic system based on RFID technology to detect the actuator. This allows to provide each actuator with different coding and makes it impossible to tamper with a device by using another actuator of the same series. Millions of different coding combinations are possible for the actuators. They are therefore classified as high level coded actuators, according to EN ISO 14119.


## Protection degrees IP67 and IP69K

**IP69K**  
**IP67**

These devices are designed to be used under the toughest environmental conditions, and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where the maximum degree of protection is required for the housing. Due to


their special design, these devices are suitable for use in equipment subjected to cleaning with high pressure hot water jets. These devices meet the IP69K test requirements according to ISO 20653 (water jets with 100 bar and 80°C).

## Wide actuation range



By utilising the properties of RFID technology, the sensors of the ST D series have a wide actuation range, making them very well suited for applications with large tolerances or where mechanical properties change over time.

## Actuation from many directions



The sensors of the ST D series from Pizzato Elettrica were designed to be activated from various directions, thereby providing the customer with maximum flexibility when positioning the sensors on the guards. Furthermore, the SM D•T actuator can be secured in two mutually orthogonal directions.




### Programmability

Pizzato Elettrica supplies a programmable version of the ST D series sensors. With a simple and brief operation, the sensor can be programmed to recognise the code of a new actuator.

By activating a special input, the sensor is switched to a safe state, during which it waits for a new code to be accepted. As the actuator approaches, the ST D sensor performs a number of checks on the code being received, whereby the code must adhere to certain parameters of RFID technology.

If the checks are successful, the sensor uses LEDs to signal the successful completion of the procedure.

After programming has been completed, the sensor only recognises the code of the last programmed actuator, thereby preserving the safety level and the reliability of the system in which it is installed.



### Laser engraving


All devices are marked using a dedicated indelible laser system. These engravings are therefore suitable for extreme environments too. Thanks to this system that does not use labels, the loss of plate data is prevented and a greater resistance of the marking is achieved over time.




### Short signal propagation delay

One of the main features of the ST D sensors is the short signal propagation time of approx. 7 ms after deactivation of the inputs.

This short signal propagation time is particularly advantageous for sensors connected in series.

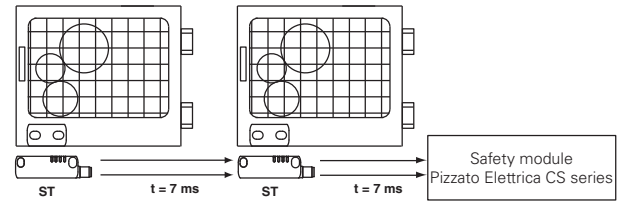


### Stainless steel fixing plates




The stainless-steel fixing plates for the ST D sensors not only protect the mounting eyes during installation on surfaces that are not perfectly flat, they also help the sensor better withstand mechanical loads. As a result, the system is safer and more reliable.

### Protection against tampering



Each sensor and actuator of the ST D series is supplied complete with snap-on protection caps to be applied on the holes of the fixing screws. Not only do the caps prevent dirt from accumulating and simplify cleaning, they also block access to the fastening screws of the actuator. As a result, standard screws can be used instead of tamper-proof screws.

### Insensitivity to dirt




The sensors are completely sealed and retain their safety characteristics even in the presence of dirt or deposits (not ferromagnetic material). This characteristic, combined with the design without recesses, makes them particularly suitable for use in the food industry.

### Four LEDs for immediate diagnosis

As the LEDs have been designed for quick immediate diagnosis, the status of each input and output is highlighted by one specific LED. By knowing which device is active and which door is open, it is possible to quickly identify an interruption in the safety chain as well as any internal device errors. All of this at a glance, without needing to decode complex flashing sequences.



### Versions with increased actuation distance



In addition to the standard actuation distance of 12 mm, sensors with an actuation distance of 20 mm are also available. The increased actuation distance of the sensors is ideal for installation situations in which it is not possible to ensure that the actuator approaches the sensor in a precise and stable manner.

### New compact actuators

In addition to the standard actuators, the new compact actuators SM L•T are now available to order; these actuators have a single mounting direction (frontal) and maintain the same actuation distance of 12 mm as the actuator SM D•T.

Due to the reduced thickness (just 7 mm), they can be installed in all applications with restricted space conditions and thereby enable use of RFID technology, even with guards of small dimensions.




### External device monitoring

**EDM** On request, the switch can be supplied with EDM function (External Device Monitoring). In this case, the switch itself checks the proper function of the devices connected to the safety outputs. These devices (usually relays or safety contactors) must send a feedback signal to the EDM input, which checks that the received signal is consistent with the state of the safety outputs.

### Extended supply voltage range

In addition to the standard 24 Vdc supply voltage, the ST D series sensors are available with an extended supply voltage of 12 ... 24 Vdc (articles ST D•••1••). This characteristic makes them particularly suitable for use in the automotive sector, in machines powered by common battery systems, and both in light and heavy vehicles.

## Selection diagram

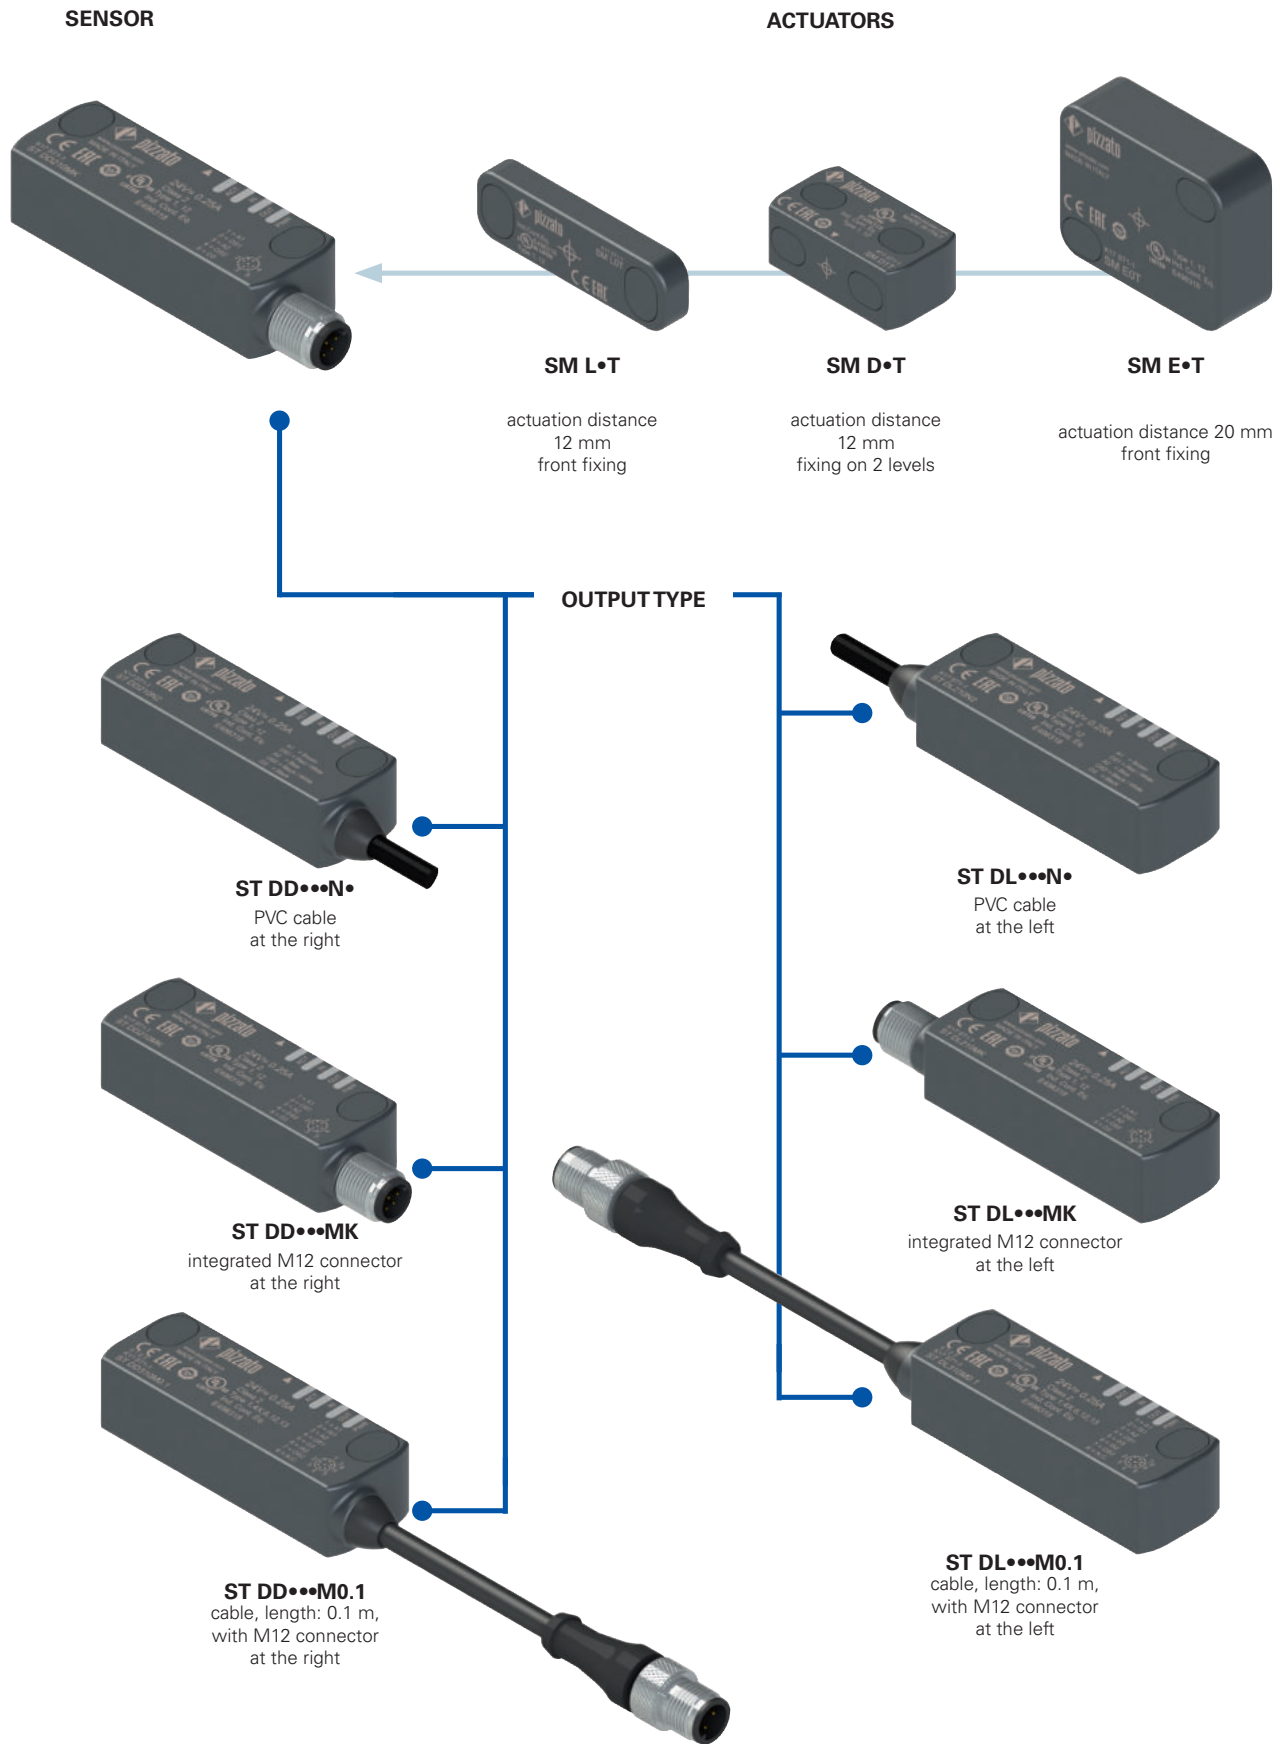

- product option
- Sold separately as accessory



**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

## Code structure for sensor with actuator

# ST DD420N2-D1T

### Output direction, connections

<b>D</b>	output at the right
<b>L</b>	output at the left

### Inputs and outputs

	OS safety outputs	O3 signalling outputs	IS safety inputs	I3 programming inputs	EDM inputs
<b>21</b>	2	1	-	-	-
<b>31</b>	2	1	2	-	-
<b>42</b>	2	1	2	1	-
<b>51</b>	2	1	2	-	1
<b>61</b>	2	1 (inverted)	-	-	-
<b>71</b>	2	1 (inverted)	2	-	-
<b>82</b>	2	1 (inverted)	2	1	-

**Note:** versions 21, 31, 51, 61, 71 are only supplied together with an actuator.

### Supply voltage

<b>0</b>	24 Vdc
<b>1</b>	12 ... 24 Vdc

### Cable or connector type

<b>N</b>	PVC cable, IEC 60332-1-2 oil resistant (standard)
<b>H</b>	PUR cable, halogen free (not available with versions ST D•2••••• and ST D•6•••••)
<b>M</b>	M12 connector

### Actuator

<b>D0T</b>	standard actuator low level of coding the sensor recognises any type D0T actuator
<b>D1T</b>	standard actuator high level of coding the sensor recognises one single type D1T actuator
<b>E0T</b>	Large actuator low level of coding the sensor recognises any type E0T actuator
<b>E1T</b>	Large actuator high level of coding the sensor recognises one single type E1T actuator
<b>L0T</b>	miniaturized actuator low level of coding the sensor recognises any type L0T actuator
<b>L1T</b>	miniaturized actuator high level of coding the sensor recognises one single type L1T actuator

### Connection type

<b>0.1</b>	cable, length: 0.1 m, with M12 connector
<b>0.5</b>	cable, length: 0.5 m
...	...
<b>2</b>	cable, length: 2 m (standard)
...	...
<b>10</b>	cable, length: 10 m
<b>K</b>	integrated M12 connector

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

## Code structure for single sensor

# ST DD420N2

### Output direction, connections

<b>D</b>	output at the right
<b>L</b>	output at the left

### Inputs and outputs

	OS safety outputs	O3 signalling outputs	IS safety inputs	I3 programming inputs
<b>42</b>	2	1	2	1
<b>82</b>	2	1 (inverted)	2	1

### Supply voltage

<b>0</b>	24 Vdc
<b>1</b>	12 ... 24 Vdc

### Connection type

<b>0.1</b>	cable, length: 0.1 m, with M12 connector
<b>0.5</b>	cable, length: 0.5 m
...	...
<b>2</b>	cable, length: 2 m (standard)
...	...
<b>10</b>	cable, length: 10 m
<b>K</b>	integrated M12 connector

### Cable or connector type

<b>N</b>	PVC cable, IEC 60332-1-2 oil resistant (standard)
<b>H</b>	PUR cable, halogen free (not available with versions ST D•2••••• and ST D•6•••••)
<b>M</b>	M12 connector

**Attention!** Individual sensors are initially programmed with the code of the actuators with low coding level •0T.  
**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

## Code structure for actuator

# SM D1T

### Design and actuation distance

<b>D</b>	standard actuator actuation distance 12 mm
<b>E</b>	large actuator actuation distance 20 mm
<b>L</b>	miniaturized actuator actuation distance 12 mm

### Actuator

<b>0T</b>	low level coded actuator the sensor recognises any type •0T actuator
<b>1T</b>	high level coded actuator the sensor recognises one single type •1T actuator





### Main features

- Actuation without contact, using RFID technology
- Digitally coded actuator
- Protection degrees IP67 and IP69K
- 4 LEDs for status display of the sensor
- Actuators with various actuation distances

### Quality marks:



UL approval: E496318  
 EC type examination certificate: M6A 075157 0027  
 TÜV SÜD approval: Z10 075157 0026  
 EAC approval: RUC-IT.YT03.B.00035/19

### In compliance with standards:

IEC 61508-1, IEC 61508-2, IEC 61508-3,  
 IEC 61508-4, EN ISO 13849-1, EN ISO 13849-2,  
 EN ISO 14119, EN 62061, EN 60947-5-3,  
 EN 60947-5-2, EN 60947-1, EN 61326-1,  
 EN 61326-3-1, EN 61326-3-2, EN IEC 63000,  
 ETSI 301 489-1, ETSI 301 489-3, ETSI 300 330,  
 UL 508, CSA C22.2 No. 14.

### Compliance with the requirements of:

Machinery Directive 2006/42/EC,  
 EMC Directive 2014/30/EC,  
 Directive 2014/53/EU - RED,  
 RoHS Directive 2011/65/EU,  
 FCC Part 15.

### Connection with safety modules for safety applications:

Connection with safety modules  
 CS AR-01●●●●; CS AR-02●●●●; CS AR-05●●●●;  
 CS AR-06●●●●; CS AR-08●●●●; CS AT-0●●●●●;  
 CS AT-1●●●●●; CS MP●●●●●.

When connected to the safety module, the sensor can be classified as a control circuit device up to PDDb (EN 60947-5-3).

The system can be used in safety circuits up to PL e/SIL 3/category 4 in accordance with EN ISO 13849-1.

## Technical data

### Housing

Housing made of glass fibre reinforced technopolymer, self-extinguishing.  
 Versions with integrated cable 6 x 0.5 mm<sup>2</sup> or 8 x 0.34 mm<sup>2</sup>, length 2 m, other lengths 0.5 m ... 10 m on request

Versions with M12 stainless steel connector

Versions with 0.1 m cable length and integrated M12 connector, other lengths 0.1 ... 3 m on request

Protection degree:

IP67 acc. to EN 60529

IP69K acc. to ISO 20653

(Protect the cables from direct high-pressure and high-temperature jets)

### General data

SIL (SIL CL) up to:

SIL 3 acc. to EN 62061

Performance Level (PL) up to:

PL e acc. to EN ISO 13849-1

Safety category up to:

cat. 4 acc. to EN ISO 13849-1

Interlock, no contact, coded:

type 4 acc. to EN ISO 14119

Level of coding acc. to EN ISO 14119:

high with SM ●1T actuators  
 low with SM ●0T actuators

Safety parameters:

MTTF<sub>D</sub>:

4077 years

PFH<sub>D</sub>:

1.20E-11

DC:

High

Mission time:

20 years

Ambient temperature for sensors without cable:

-25°C ... +70°C

Ambient temperature for sensors with cable:

see table on page 46

Storage and transport temperature:

-25°C ... +85°C

Vibration resistance:

10 gn (10 ... 150 Hz) acc. to IEC 60068-2-6

Shock resistance:

30 gn; 11 ms acc. to EN 60068-2-27

Pollution degree

3

Screw tightening torque:

0.8 ... 2 Nm

### Electrical data of IS1/IS2/I3/EDM inputs

Rated operating voltage U<sub>e1</sub>:

24 Vdc or 12 ... 24 Vdc

Rated current consumption I<sub>e1</sub>:

5 mA

### Electrical data of OS1/OS2 safety outputs

Rated operating voltage U<sub>e2</sub>:

24 Vdc or 12 ... 24 Vdc

Output type:

PNP type OSSD

Maximum current per output I<sub>e2</sub>:

0.25 A

Minimum current per output I<sub>m2</sub>:

0.5 mA

Thermal current I<sub>th2</sub>:

0.25 A

Utilization category:

DC13; U<sub>e2</sub>=24 Vdc, I<sub>e2</sub>=0.25 A

Short circuit detection:

Yes

Overcurrent protection:

Yes

Internal self-resettable protection fuse:

0.75 A

Duration of the deactivation impulses at the safety

outputs:

< 300 μs

Permissible maximum capacitance between outputs:

< 200 nF

Permissible maximum capacitance between output and ground:

< 200 nF

### Electrical data of O3 signalling output

Rated operating voltage U<sub>e3</sub>:

24 Vdc or 12 ... 24 Vdc

Output type:

PNP

Maximum current per output I<sub>e3</sub>:

0.1 A

Utilization category:

DC12; U<sub>e3</sub>=24 Vdc; I<sub>e3</sub>=0.1 A

Short circuit detection:

No

Overcurrent protection:

Yes

Internal self-resettable protection fuse:

0.75 A

### Actuation data

Assured operating distance S<sub>ao</sub>:

10 mm

16 mm

10 mm

Assured release distance S<sub>ar</sub>:

16 mm

27 mm

16 mm

Rated operating distance S<sub>an</sub>:

12 mm

20 mm

12 mm

Rated release distance S<sub>nr</sub>:

14 mm

23 mm

14 mm

Repeat accuracy:

≤ 10 % s<sub>n</sub>

Differential travel:

≤ 20 % s<sub>n</sub>

RFID transponder frequency:

125 kHz

Max. switching frequency:

1 Hz

Distance between two sensors:

min. 50 mm

Response time upon deactivation of input IS1 or IS2:

typically 7 ms, max. 12 ms

Response time upon actuator removal:

typically 80 ms, max. 150 ms

### Power supply electrical data

Rated operating voltage U<sub>e</sub>:

- 24 Vdc versions

24 Vdc -15% ... +10% SELV/PELV

- 12 ... 24 Vdc versions

12 ... 24 Vdc -30% ... +25% SELV/PELV

Operating current at U<sub>e</sub> voltage:

- minimum:

40 mA

- with all outputs at maximum power:

700 mA

Rated insulation voltage U<sub>i</sub>:

32 Vdc

Rated impulse withstand voltage U<sub>imp</sub>:

1.5 kV

External protection fuse:

1 A type Gg or equivalent device

Overvoltage category:

III



### Features approved by UL

Electrical Ratings: 24 Vdc Class 2, 0,25 A (resistive load)  
 Environmental Ratings: Types 1, 4X, 6, 12, 13  
 Accessory for series ST for actuator switch series SM D, SM E, SM G, SM L.

### Features approved by TÜV SÜD

Supply voltage: 24 Vdc, -15% ... +10%  
 12 ... 24 Vdc -30% ... +25%  
 Protection degree: IP67 and IP69K  
 Ambient temperature: -25°C ... + 70°C  
 Storage and transport temperature: -25°C ... +85°C  
 PL, category: PL e, category 4

In compliance with standards: Machinery Directive 2006/42/EC, EN ISO 13849-1:2015, EN 60947-5-3:2013, EN 61508-1:2010 (SIL 3), EN 61508-2:2010 (SIL 3), EN 61508-3:2010 (SIL 3), EN 61508-4:2010 (SIL 3), IEC 62061:2005 (SIL CL3), IEC 62061:2005/AMD1:2012, IEC 62061:2005/AMD2:2015 (SIL CL3).

Please contact our technical department for the list of approved products.

Please contact our technical department for the list of approved products.

### Selection table for sensors with high level coded actuators

OS safety outputs	O signalling outputs	IS safety inputs	I programming inputs	EDM inputs	Programmable	cable, length: 0.1 m, with M12 connector at the right		cable, length: 0.1 m, with M12 connector at the left		integrated cable, at the right	integrated cable, at the left	M12 connector, at the right	M12 connector, at the left
						ST DD210M0.1-D1T	ST DL210M0.1-D1T	ST DD210N•-D1T	ST DL210N•-D1T	ST DD210MK-D1T	ST DL210MK-D1T		
2	1	-	-	-	-								
2	1	2	-	-	-								
2	1	2	1	-	•								
2	1	2	-	1	-								

To order a product with E•T or L•T actuator replace D with E or L in the codes shown above.  
 For example: ST DD310M0.1-D•T → ST DD310M0.1-E•T or ST DD310M0.1-L•T

### Selection table for sensors

OS safety outputs	O signalling outputs	IS safety inputs	I programming inputs	EDM inputs	Programmable	cable, length: 0.1 m, with M12 connector at the right		cable, length: 0.1 m, with M12 connector at the left		integrated cable, at the right	integrated cable, at the left	M12 connector, at the right	M12 connector, at the left
						ST DD420M0.1	ST DL420M0.1	ST DD420N•	ST DL420N•	ST DD420MK	ST DL420MK		
2	1	2	1	-	•								

### Selection table for actuators

Level of coding acc. to ISO 14119	actuation distance 12 mm	actuation distance 12 mm	actuation distance 20 mm
low	SM L1T	SM D1T	SM E1T

The use of RFID technology in ST series sensors makes them suitable for several applications. Pizzato Elettrica offers two different versions of actuators, in order to best suit customers' specific needs.

Type •0T actuators are all encoded with the same code. This implies that a sensor associated with an actuator type •0T can be activated by other actuators type •0T.

Type •1T actuators are always encoded with different codes. This implies that a sensor associated with an actuator type •1T can be activated only by a specific actuator. Another •1T type actuator will not be recognised by the sensor until a new association procedure is carried out (reprogramming). After reprogramming, the old actuator type •1T will no longer be recognized.

Reprogramming of the actuator can be performed repeatedly.


### Ambient temperature for sensors with cable

Cable features	Connection type	Output with cable			Output with cable and M12 connector
		N	N	H	
Cable type		N	N	H	
Conductors		6x0.5 mm <sup>2</sup>	8x0.34 mm <sup>2</sup>	8x0.34 mm <sup>2</sup>	8x0.25 mm <sup>2</sup>
Application field		General	General	General, mobile installation	General
In compliance with standards		03VV-F	03VV-F	03E7Q-H	03VV-H
Sheath		PVC OIL RESISTANT	PVC OIL RESISTANT	PUR Halogen Free	PVC OIL RESISTANT
Self-extinguishing		IEC 60332-1-2 UL 758:FT1 CEI 20-22 II	IEC 60332-1-2 UL 758:FT1 CEI 20-22 II	IEC 60332-1-2 UL 758:FT1	IEC 60332-1-2 UL 758:FT1 CEI 20-22 II
Oil resistant		UL 758 CSA 22.2 N°210	UL 758 CSA 22.2 N°210	UL 758 CSA 22.2 N°210	UL 758 CSA 22.2 N°210
Max. speed		/	/	300 m/min.	50 m/min.
Max. acceleration		/	/	30 m/s <sup>2</sup>	5 m/s <sup>2</sup>
Minimum bending radius		108 mm	108 mm	70 mm	90 mm
Outer diameter		7 mm	7 mm	7 mm	6 mm
End stripped		80 mm	80 mm	80 mm	/
Copper conductors		Class 6 IEC 60228	Class 5 IEC 60228	Class 6 IEC 60228	Class 6 IEC 60228
Engraving		6272	6276	6283	6275
Ambient temperature	Cable, fixed installation	-25°C +70°C	-25°C +70°C	-25°C +70°C	-25°C +70°C
	Cable, flexible installation	-5°C +70°C	-5°C +70°C	-25°C +70°C	-15°C +70°C
	Cable, mobile installation	/	/	-25°C +70°C	-15°C +70°C
Approvals		CE cULus TÜV EAC	CE cULus TÜV EAC	CE cULus TÜV EAC	CE cULus TÜV EAC

→ The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)

### Complete safety system

The use of complete and tested solutions guarantees the electrical compatibility between the sensors of the ST series and the safety modules from Pizzato Elettrica, as well as high reliability. The sensors have been tested with the modules listed in the adjacent table.

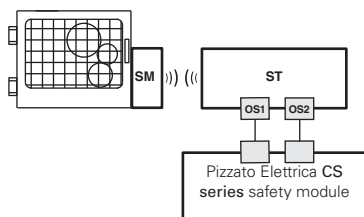


ST sensors can be used as individual devices provided that the outputs be evaluated by a Pizzato Elettrica safety module (see table for combinable safety modules).


### Compatible safety modules

Sensors	Safety modules	Safety module output contacts		
		Instantaneous safety contacts	Delayed safety contacts	Signalling contacts
ST D•••••	CS AR-01•••••	2NO	/	1NC
	CS AR-02•••••	3NO	/	/
	CS AR-05•••••	3NO	/	1NC
	CS AR-06•••••	3NO	/	1NC
	CS AR-08•••••	2NO	/	/
	CS AT-0•••••	2NO	2NO	1NC
	CS AT-1•••••	3NO	2NO	/
	CS MP•••••	see page 369		
	CS MF•••••	see page 401		

All ST series sensors can be connected, provided that compatibility is checked, to safety modules or safety PLCs with OSSD inputs.

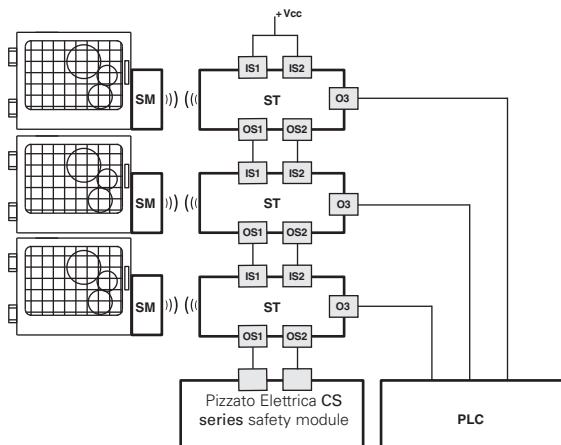


Possibility of series connection of multiple sensors for simplifying the wiring of the safety system, whereby only the outputs of the last sensor are evaluated by a Pizzato Elettrica safety module (see table with compatible safety modules). Each ST sensor is equipped with a signalling output, which – depending on the version – is activated or deactivated when the respective guard is closed. Depending on the specific requirements of the application, this information can be evaluated by a PLC.

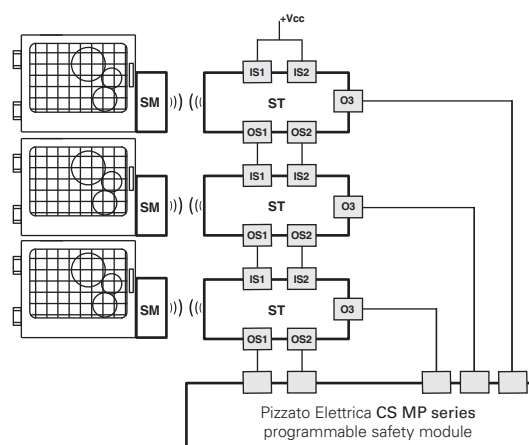

Possibility of series connection of multiple sensors for simplifying the wiring of the safety system, whereby only the outputs of the last sensor are evaluated by a Pizzato Elettrica safety module of the CS MP series. Both the safety-relevant evaluation and the evaluation of the signalling outputs are performed by the CS MP series.

### Internal wiring diagram (ST D•5••••)

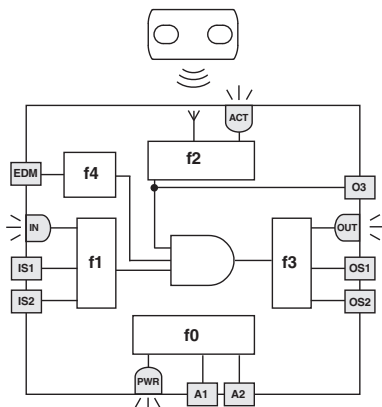

The adjacent diagram illustrates five logical, linked sub-functions of the sensor.

Function f0 is a basic function and includes the monitoring of the power supply as well as internal, cyclical tests.

Function f1 monitors the status of the inputs, whereas function f2 monitors the position of the actuator in the detection area.

Function f3 is intended to activate or deactivate the safety outputs and check for any faults or short circuits in the outputs.

In the EDM versions, function f4 checks the EDM signal on state changes of the safety outputs.

The safety-related function, which combines the sub-functions mentioned above, only activates the safety outputs if the input signals are correctly applied and the actuator is located within the safe zone.


The status of each sub-function is displayed by corresponding LEDs (PWR, IN, ACT, OUT), thereby providing a quick overview of the operating status of the sensor.

LED	Function
ACT	state of actuator / O3 output
IN	status of safety inputs
OUT	status of safety outputs
PWR	Power supply / self-diagnosis




### Limit activation zone and safe activation zone (ST D•4••••)


When aligning the sensor with the actuator, the status LEDs use various colours to indicate whether the actuator is in the limit activation zone or in the safe activation zone. The following figures use the ST DD420MK-D1T sensor as an example.




Operating voltage is applied to the sensor, (LED PWR on, green), the inputs are enabled (LED IN on, green), the outputs are deactivated (LED OUT off). The actuator is outside of the actuation zone (LED ACT off).



If the actuator is moved inside the safe activation zone (dark grey area), the ACT LED on the sensor illuminates (green) and it activates the outputs (LED OUT on, green).



When the actuator leaves the safe zone, the sensor keeps the safety outputs enabled. Entry into the limit activation zone (light grey area) is, however, indicated by the ACT LED (orange/green, flashing).




As soon as the actuator exits the limit activation zone, the sensor deactivates the outputs and switches off the OUT and ACT LEDs.

### Operating states (ST D•4••••)

PWR LED	OUT LED	IN LED	ACT LED	Sensor state	Description
○	○	○	○	OFF	Sensor off.
●	○	○	○	POWER ON	Internal tests upon activation.
●	*	○	*	RUN	Sensor with inactive inputs.
●	*	●	*	RUN	Activation of the inputs.
●	*	◌	*	RUN	Input incoherence. Recommended action: check for presence and/or wiring of inputs.
●	*	*	●	RUN	Actuator in safe area. O3 signalling output active.
●	*	*	◌	RUN	Actuator in limit activation zone, O3 active. Recommended action: bring the sensor back to the safe area.
●	●	●	●	RUN	Activation of the inputs. Actuator in safe area and safety outputs active.
●	◌	*	*	ERROR	Error on outputs. Recommended action: check for any short circuits between the outputs, outputs and ground or outputs and power supply, then restart the sensor.
●	*	*	*	ERROR	Internal error. Recommended action: restart the sensor. If the failure persists, replace the sensor.

Legend: ○ = off ● = on ◌ = flashing ◐ = alternating colours \* = indifferent


### External device monitoring (EDM)



The ST D•51••• version, in addition to maintaining the operating and safety characteristics of the ST series, allows control of **forcibly guided NC contacts of contactors or relays** controlled by the safety outputs of the sensor itself. As an alternative to the relays or contactors you can use Pizzato Elettrica expansion modules CS ME-03. See page

359.

This check is carried out by monitoring the EDM input (External Device Monitoring as defined in EN 61496-1) of the sensor.

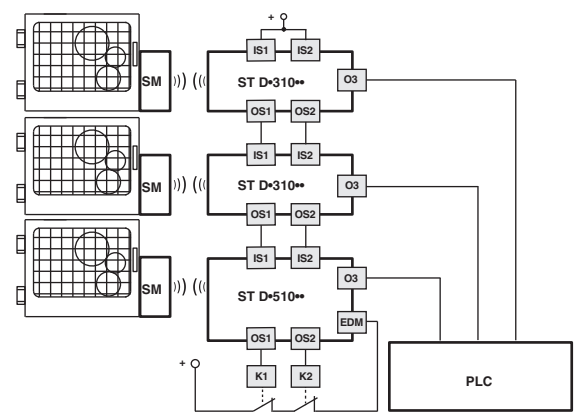


This version, with the IS safety inputs, **can be used at the end of a series of ST sensors, up to a maximum number of 32 devices**, while maintaining the maximum PL e safety level according to EN ISO 13849-1.

For specific applications, this solution allows you to dispense with the safety module connected to the last device in the chain.

### O3 output inverted (ST D•6••••, ST D•7••••, ST D•8••••)


The version with inverted O3 signalling output allows checking of the actual electrical connection of the sensor by an external PLC. The O3 output will be activated when the actuator is removed and the OS safety outputs are switched off.

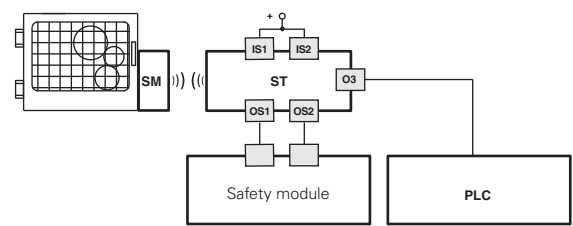

## Connection with safety modules


Connections with CS AR-08•••• safety modules

Input configuration with monitored start  
2 channels / Category 4 / up to SIL 3 / PL e




Connections with CS AR-05•••• / CS AR-06•••• safety modules

Input configuration with manual start (CS AR-05••••)  
or monitored start (CS AR-06••••)  
2 channels / Category 4 / up to SIL 3 / PL e



Connections with CS AT-0••••• / CS AT-1••••• safety modules


Input configuration with monitored start  
2 channels / Category 4 / up to SIL 3 / PL e



For features of the safety modules see page 305.

Connection with safety module CS MP•••••0

The connections vary according to the program of the module  
Category 4 / up to SIL 3 / PL e

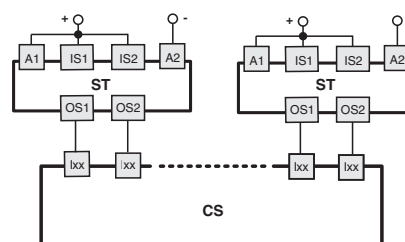


For application examples, see page 368.

## Internal device connections


### 5-pole versions ST D•2•••••, ST D•6•••••

M12 connector	Cable	Connection
1	brown	A1 (+)
2	red/white	OS1
3	blue	A2 (-)
4	black/white	OS2
5	black	O3
/	red	not connected



### 8-pole versions ST D•3•••••, ST D•4•••••, ST D•5•••••, ST D•7•••••, ST D•8•••••

M12 connector	Cable	Connection
1	brown	A1 (+)
2	red	IS1
3	blue	A2 (-)
4	red/white	OS1
5	black	O3
6	purple	IS2
7	black/white	OS2
8	purple/white	not connected <sup>(a)</sup> I3 <sup>(b)</sup> EDM <sup>(c)</sup>



<sup>(a)</sup> for articles ST D•3•••••, ST D•7•••••.  
<sup>(b)</sup> for articles ST D•4•••••, ST D•8•••••.  
<sup>(c)</sup> for articles ST D•5•••••.

#### Legend:

- A1-A2: supply
- IS1-IS2 Safety inputs
- OS1-OS2: safety outputs
- O3: signalling output
- I3: programming input
- EDM: input for monitoring of NC contacts of the contactors

**Note:** Versions with customised pin assignments are available on request.


For female connectors, see page 419.

## Series connection

To simplify series connections of the devices, various M12 connectors are available that allow complete wiring.



This solution significantly reduces installation times while at the same time maintaining the maximum safety levels PL e and SIL 3.

For further information see page 426.


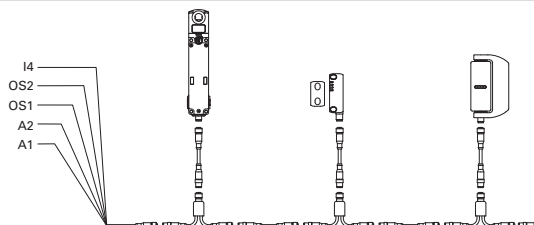




### Operating distances SM D•T/SM L•T actuators

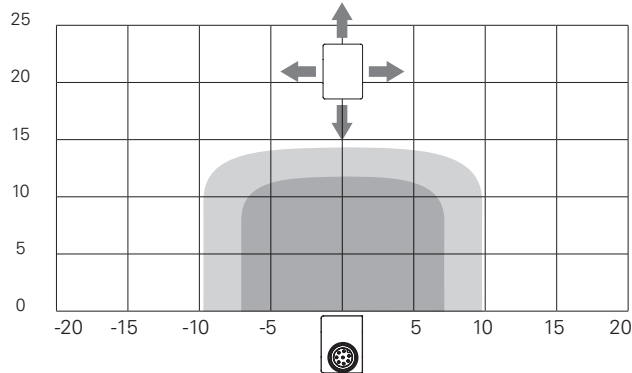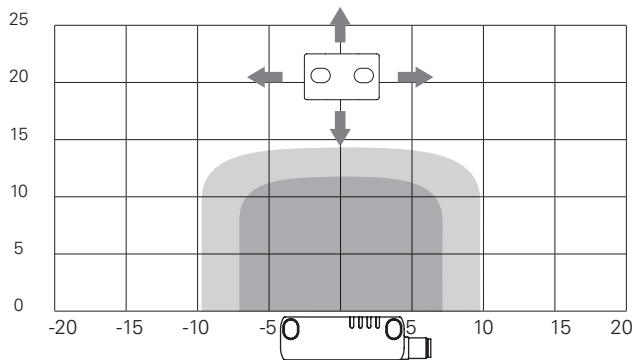

### Operating distances SM E•T actuator

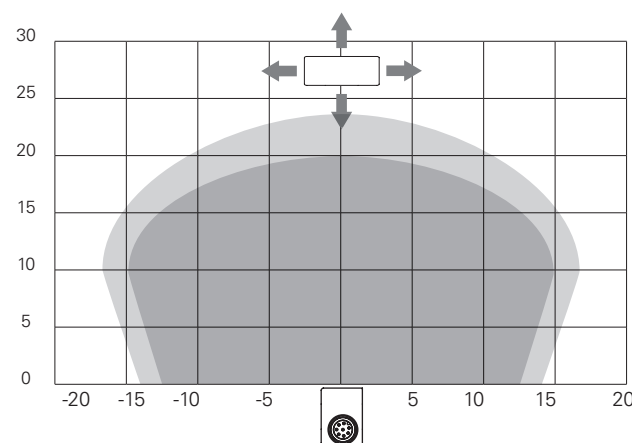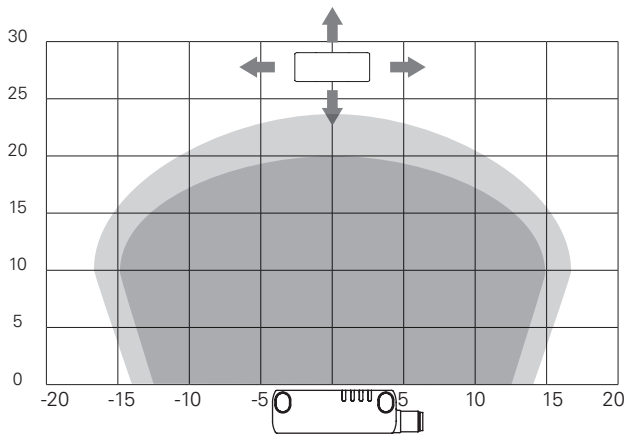


Legend:

- Rated operating distance  $s_n$  (mm)
- Rated release distance  $s_{nr}$  (mm)


Note: The progress of the activation areas is for reference only; the possible application on ferromagnetic surfaces can reduce the operating distances.

### Dimensional drawings


ST DD•••N• sensor with cable at the right




ST DD•••MK sensor with M12 connector at the right




ST DD•••M0.1 sensor with cable and M12 connector at the right




ST DL•••N• sensor with cable at the left




ST DL•••MK sensor with M12 connector at the left




ST DL•••M0.1 sensor with cable and M12 connector at the left




SM D•T actuator



SM E•T actuator



SM L•T actuator



All values in the drawings are in mm

Accessories See page 419

→ The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)

## Introduction



The RFID safety sensors of the ST G - ST H series represent the evolution of the ST D series already known and appreciated by machine builders and users.

The symmetry of the housing allows the same sensor to be used on both left and right doors; by simply rotating the sensor onto itself. The mounting hole spacing (22 mm for the ST G series, 78 mm for the ST H series) was especially realised to perform a technological upgrade of the traditional magnetic sensors of the SR A and SR B series, replacing these with an evolved RFID safety sensor, without changing the machine's mounting hole spacing.

The monolithic housing – free of resins for encapsulation – can be used in even the most aggressive of environments; such as, for example, in the food and pharmaceuticals sector.

## Maximum safety with a single device

# PL e + SIL 3

The sensors of the ST G - ST H series are constructed with redundant electronics. As a result, the maximum PL e and SIL 3 safety levels can still be achieved through the use of a single device on a guard. This avoids expensive wiring in the field and allows faster installation. Inside the control cabinet, the two electronic safety outputs must be connected to a safety module with OSSD inputs or to a safety PLC.

## High level coded actuators




The sensors are provided with an electronic system based on RFID technology to detect the actuator. This allows to provide each actuator with different coding and makes it impossible to tamper with a device by using another actuator of the same series. Millions of different coding combinations are possible for the actuators. They are therefore classified as high level coded actuators, according to EN ISO 14119.

## Series connection of multiple sensors

One of the most important features of the ST G - ST H series from Pizzato Elettrica is the possibility of connecting up to 32 sensors in series, while still maintaining the maximum safety level (PL e) laid down in EN 13849-1.


This connection type is permissible in safety systems which have a safety module at the end of the chain that monitors the outputs of the last sensor.

The fact that the PL e safety level can be maintained even with 32 sensors connected in series demonstrates the extremely secure structure of each sensor of this series.

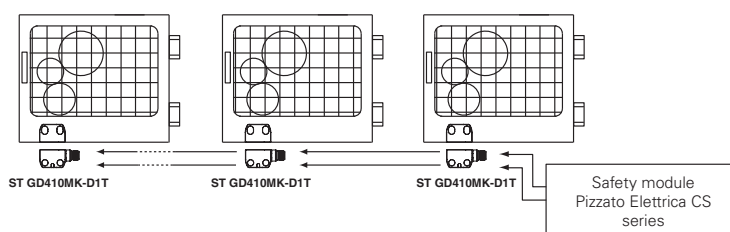


## Series connection with other devices

The ST G - ST H series features two safety inputs and two safety outputs, which can be connected in series with other Pizzato Elettrica safety devices. This option allows the creation of safety chains containing various devices. For example, stainless steel hinge switches (HX BEE1 series), RFID sensors (ST series) and guard-locking switches (NG or NS series) can be connected in series while still maintaining the maximum PL e and SIL 3 safety levels.

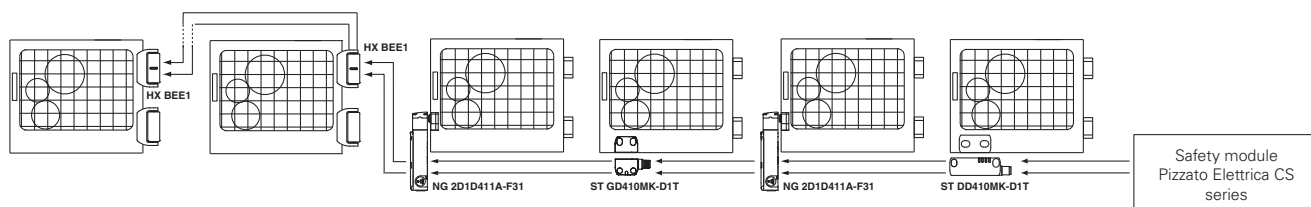

## Protection against tampering



Each sensor and actuator is supplied complete with snap-on protection caps to be applied on the holes of the fixing screws. Not only do the caps prevent dirt from accumulating and simplify cleaning, they also block access to the fastening screws of the actuator. As a result, standard screws can be used instead of tamper-proof screws.


## Protection degrees IP67 and IP69K

# IP69K IP67

These devices are designed to be used under the toughest environmental conditions, and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where the maximum degree of protection is required for the housing. Due to

their special design, these devices are suitable for use in equipment subjected to cleaning with high pressure hot water jets. These devices meet the IP69K test requirements according to ISO 20653 (water jets with 100 bar and 80°C).

## Actuation from many directions



The sensors were designed to be activated from various directions, thereby providing the customer with maximum flexibility when positioning the sensors on the guards.


## Laser engraving

All devices are marked using a dedicated indelible laser system. These engravings are therefore suitable for extreme environments too. Thanks to this system that does not use labels, the loss of plate data is prevented and a greater resistance of the marking is achieved over time.





### Symmetrical housing

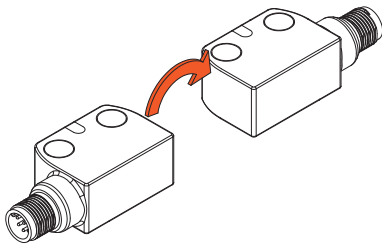

Both sensor and actuator are perfectly symmetrical, and can therefore be attached to the machine frame in any orientation.

This feature allows the user to decide the side on which the cable or connector should exit, according to the sensor mounting position, by simply rotating it into the desired direction; thus eliminating the need to order differently coded products.


### Multicolour signalling LED



The ST G - ST H series sensors have a multicolour RGB signalling LED, which, using suitable transparent lenses, can be seen from both sides of the device. This allows fast, immediate diagnostics of the input and output operating states.

This makes it possible to quickly identify the interruption points in the safety chain, active devices, open guards, and any internal device errors – all of which can be identified simply and intuitively.


### Insensitivity to dirt and protection of the cable



The sensors are completely sealed and retain their safety characteristics even in the presence of dirt or deposits (not ferromagnetic material). This characteristic, combined with the design without recesses, makes them particularly suitable for use in the food industry. In the versions with cable, this is protected with a gasket located near the output of the switch.

This gasket is also provided with knurling by means of which a corrugated tube can be fastened as cable protection.


### Special multitag versions



Special versions of the device are available that have two or more actuators with a high level of coding, all of which can be recognised by the same sensor. The internal firmware of the sensor can be factory programmed, memorising a different device behaviour for each actuator when the actuator is in front of the sensor.

The multitag function is particularly useful in machines with several work stations, that require various operating modes on the basis of the actuator recognised by the sensor (e.g.: interchangeable machine parts, position of robot, rotary tables, etc.)

### Magnetic holding of the actuator



Devices of the ST H series can be ordered with a permanent magnet installed inside the housing, able to generate a holding force between sensor and actuator.

This way, the guard can be kept closed even when there are vibrations or when there is a recoil during the closing stage.

The magnetic holding force can be selected in three different magnitudes to best adapt to any usage situation.

### External device monitoring

**EDM** On request, the switch can be supplied with EDM function (External Device Monitoring). In this case, the switch itself checks the proper function of the devices connected to the safety outputs. These devices (usually relays or safety contactors) must send a feedback signal to the EDM input, which checks that the received signal is consistent with the state of the safety outputs.


### Programmability

Programmable sensor versions are available. Here, with a simple and brief operation, the sensor can be programmed to recognise the code of a new actuator.

By activating a special input, the sensor is switched to a safe state, during which it waits for a new code to be accepted. As the actuator approaches, the sensor performs a number of checks on the code being received, whereby the code must adhere to certain parameters of RFID technology.

If the checks are successful, the sensor uses LEDs to signal the successful completion of the procedure.

After programming has been completed, the sensor only recognises the code of the last programmed actuator, thereby preserving the safety level and the reliability of the system in which it is installed.




### Versions for mobile applications

## 10-30V

The RFID safety sensors of the ST H series are now also available in the version with 10-30 V supply voltage, designed for mobile applications where a supply voltage of 12 V is usually available, but also for situations in which the supply voltage is far from the 24 V commonly available in industrial environments.

### Extended temperature




Devices with a T8 code extension can be installed in environments with temperatures from -35°C to +85°C and are especially indicated for machines in the food and pharmaceutical sector, allowing to use ST sensors in a broad field of application.

The extended temperature versions are available for both articles with a cable, and those with a stainless steel connector.

### Compatible with all SM ••T actuators


Designed for use in conjunction with the SM G•T and SM H•T series actuators, together they form a complete assembly, even from an aesthetic point of view; the ST G and ST H sensors are also compatible with all actuators available for the ST series, with either high or low level of coding.

This is particularly useful in applications where the actuator must have specific characteristics; such as, for example, increased activation distance (SM E•T actuators), compact installation dimensions (SM L•T actuators), or fixing holes positioned on two different sides (SM D•T).

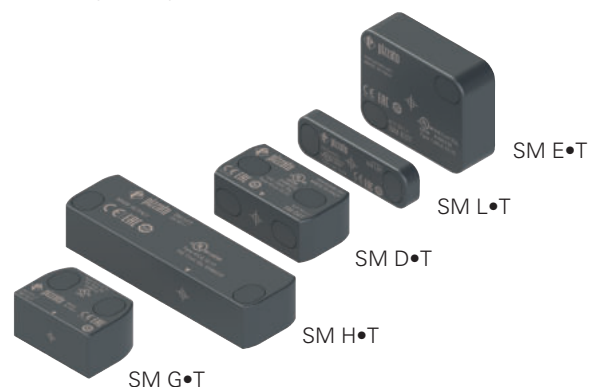



## Selection diagram

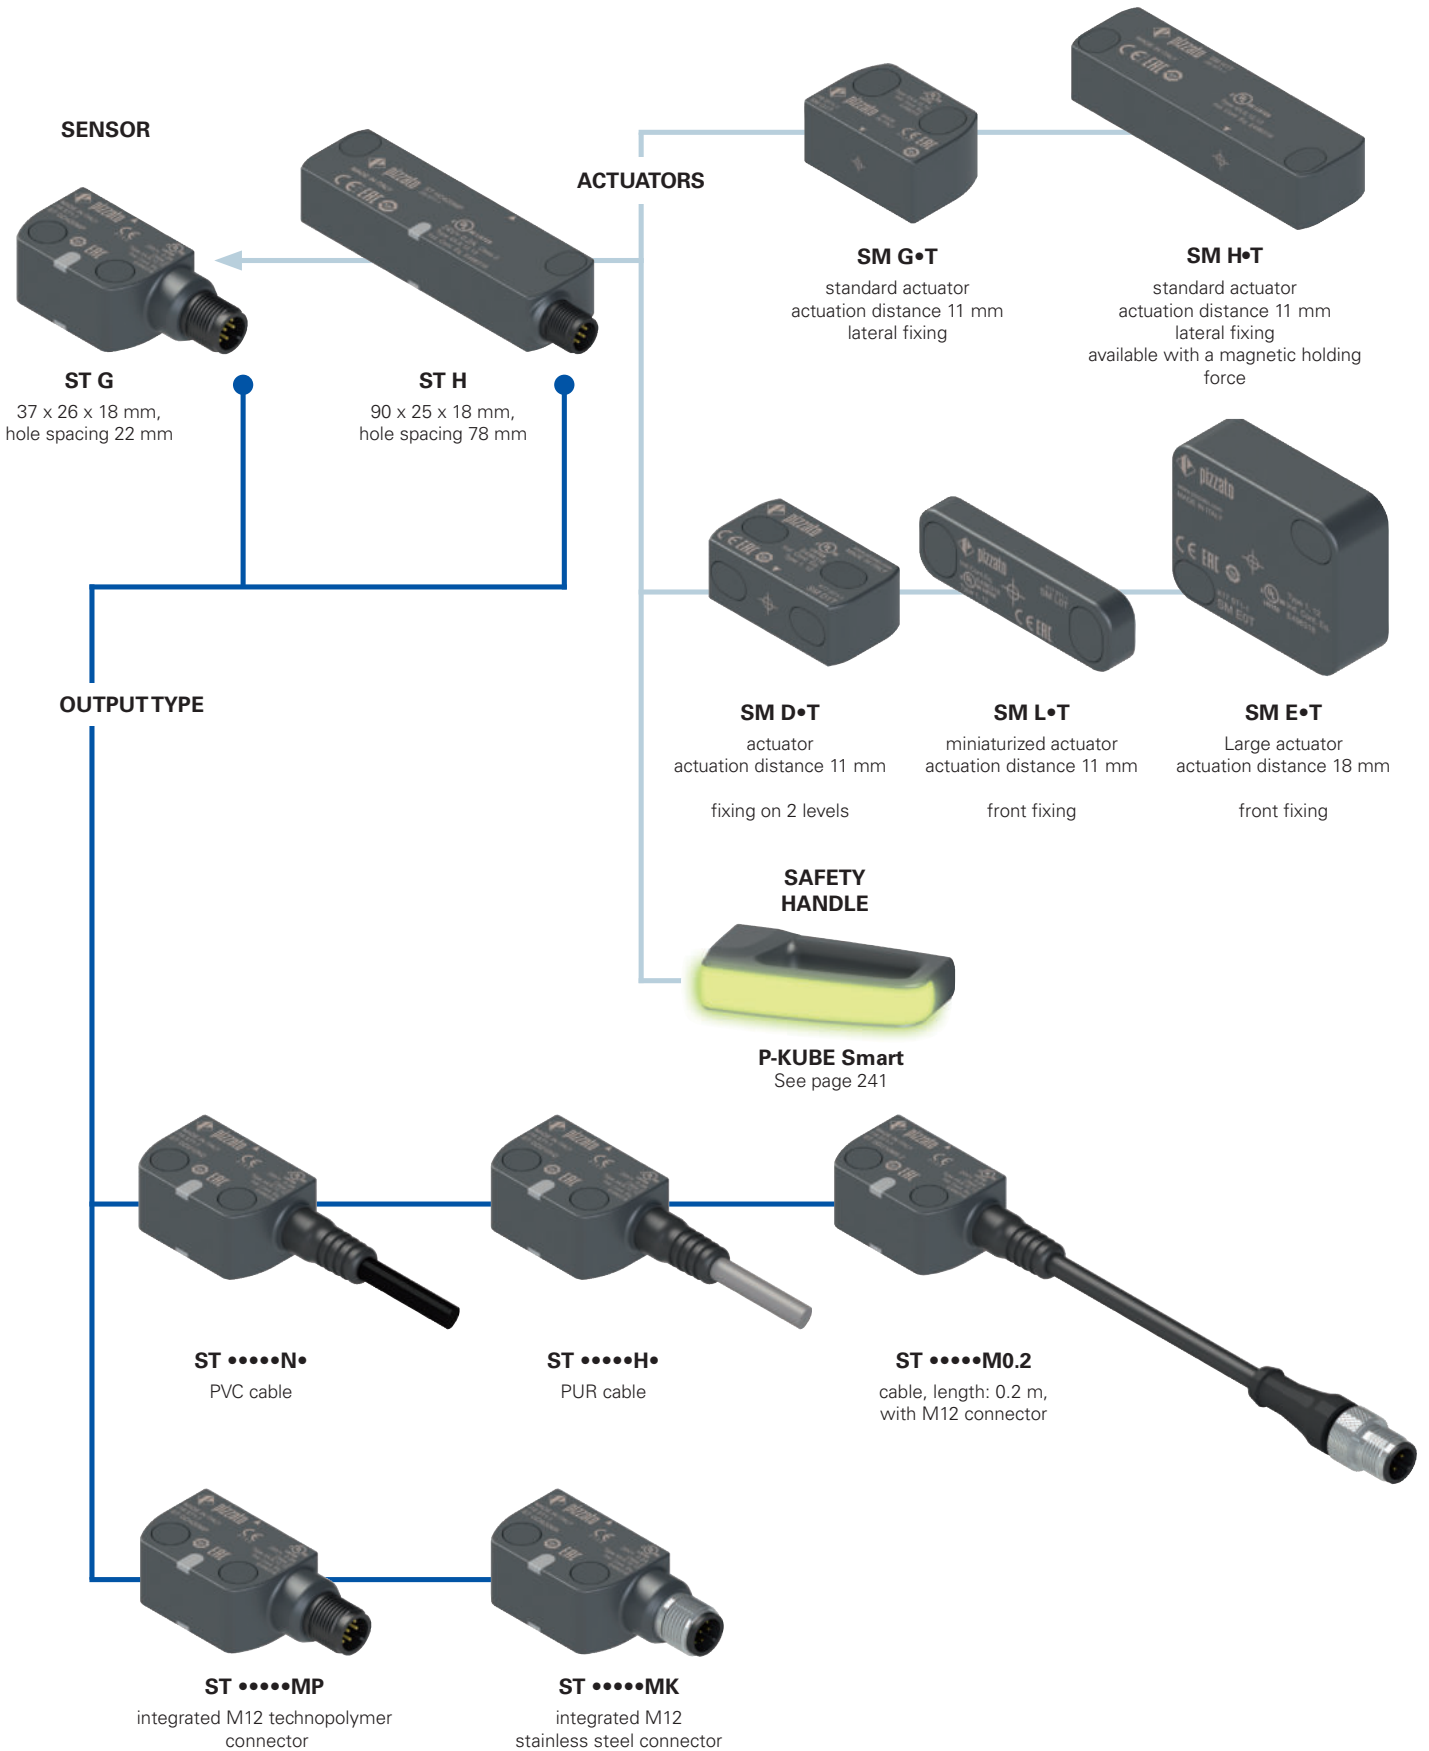

- product option
- Sold separately as accessory

**Code structure****Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article
options

**ST GD420N2-G1TE-P1T8**

Sensor design	
<b>G</b>	37 x 26 x 18 mm, mounting hole spacing 22 mm
<b>H</b>	90 x 25 x 18 mm, mounting hole spacing 78 mm

Holding magnet on the sensor	
<b>D</b>	without magnet
<b>E</b>	with magnet <sup>(1)</sup>

(1) Only for ST H••••• articles

Inputs and outputs					
	OS	O3	IS	I3	EDM
<b>1</b>	2	1 (inactive)	-	-	-
<b>2</b>	2	1	-	-	-
<b>3</b>	2	1	2	-	-
<b>4</b>	2	1	2	1	-
<b>5</b>	2	1	2	-	1
<b>6</b>	2	1 (inverted)	-	-	-
<b>7</b>	2	1 (inverted)	2	-	-
<b>8</b>	2	1 (inverted)	2	1	-
<b>9</b>	2	1 (inverted)	2	-	1

OS = safety outputs, O3 = signalling output, IS = safety inputs, I3 = programming input, EDM = EDM input

Actuator recognition	
<b>1</b>	actuator pre-programmed in the factory (Available with input/output combinations of type 2, 3, 5, 6, 7, 9) (Supplied only together with actuator)
<b>2</b>	reprogrammable actuator (Available with input/output combinations of type 4, 8)
<b>3</b>	several non-reprogrammable actuators (multitag) (Available with input/output combinations of type 2, 3, 5, 6, 7, 9) (Supplied only together with actuators)

Supply voltage	
<b>0</b>	24 Vdc
<b>1</b>	10 ... 30 Vdc (ST H only)

Cable or connector type	
<b>N</b>	PVC cable, IEC 60332-1-2 oil resistant (standard)
<b>H</b>	PUR cable, halogen free (not available with versions ST G•2•••• and ST G•6••••)
<b>M</b>	M12 connector

Ambient temperature	
	-25°C ... +70°C (standard)
<b>T8</b>	-35°C ... +85°C (not available with versions ST •••••MP)

Programming code for actuators	
<b>P1</b>	Programming 1
<b>P2</b>	Programming 2
...	other programs (on request)

See page 61. Only for ST •••3••• articles. You don't have to specify the actuator type in the article code.

Magnet and holding force on the actuator	
	without magnet
<b>E</b>	with magnet, holding force 25 N <sup>(1)</sup>
<b>F</b>	with magnet, holding force 40 N <sup>(1)</sup>
<b>G</b>	with magnet, holding force 50 N <sup>(1)</sup>

Other values on request.  
(1) Only for ST HE•••••-H••• articles

Coding level	
<b>0T</b>	low level coded actuator the sensor recognises any type •0T actuator
<b>1T</b>	high level coded actuator the sensor recognises one single type •1T actuator

Actuator design	
<b>G</b>	standard actuator Dimensions 37 x 26 x 18 mm, hole spacing 22 mm
<b>H</b>	standard actuator Dimensions 90 x 25 x 18 mm, hole spacing 78 mm
<b>D</b>	Actuator with fixing on 2 levels Dimensions 45 x 25 x 18 mm, hole spacing 27 mm
<b>E</b>	Large actuator Dimensions: 40 x 50 x 16 mm
<b>L</b>	miniaturized actuator Dimensions 53 x 16 x 7 mm, hole spacing 40 mm

Connection type	
<b>0.2</b>	cable, length: 0.2 m, with M12 connector (standard)
<b>1</b>	cable, length: 1 m
<b>2</b>	cable, length: 2 m (standard)
...	...
<b>10</b>	cable, length: 10 m
<b>P</b>	integrated M12 technopolymer connector (standard)
<b>K</b>	integrated M12 stainless steel connector

**Code structure for actuator**

article
options

**SM G1TE**

Actuator design	
<b>G</b>	standard actuator Dimensions 37 x 26 x 18 mm, hole spacing 22 mm
<b>H</b>	standard actuator Dimensions 90 x 25 x 18 mm, hole spacing 78 mm
<b>D</b>	Actuator with fixing on 2 levels Dimensions 45 x 25 x 18 mm, hole spacing 27 mm
<b>E</b>	Large actuator Dimensions: 40 x 50 x 16 mm
<b>L</b>	miniaturized actuator Dimensions 53 x 16 x 7 mm, hole spacing 40 mm

Coding level	
<b>0T</b>	low the sensor recognises any type •0T actuator
<b>1T</b>	high the sensor recognises one single type •1T actuator

Magnet and holding force on the actuator	
	without magnet
<b>E</b>	with magnet, holding force 25 N <sup>(1)</sup>
<b>F</b>	with magnet, holding force 40 N <sup>(1)</sup>
<b>G</b>	with magnet, holding force 50 N <sup>(1)</sup>

(1) for articles SM H••, can be used only in combination with an ST HE••••• sensor



### Main features

- Actuation without contact, using RFID technology
- Digitally coded actuator
- Protection degrees IP67 and IP69K
- Symmetrical housing with universal fixing orientation
- Multicolour signalling LED
- Versions with extended temperature range from -35 °C to +85 °C
- Multitag versions with two or more actuators
- ST H versions available with a magnetic holding force of the actuator
- ST H versions with extended supply voltage range 10 ... 30 Vdc

### Quality marks:



UL approval:	E496318
EC type examination certificate:	M6A 075157 0027
TÜV SÜD approval:	Z10 075157 0026
EAC approval:	RU C-IT.YT03.B.00035/19
ECOLAB approval:	0111/19 + 0096/20

### In compliance with standards:

IEC 61508-1, IEC 61508-2, IEC 61508-3, IEC 61508-4, EN ISO 13849-1, EN ISO 13849-2, EN ISO 14119, EN 62061, EN 60947-5-3, EN 60947-5-2, EN 60947-1, EN 61326-1, EN 61326-3-1, EN 61326-3-2, EN IEC 63000, ETSI 301 489-1, ETSI 301 489-3, ETSI 300 330, UL 508, CSA C22.2 No. 14.

### Compliance with the requirements of:

Machinery Directive 2006/42/EC, EMC Directive 2014/30/EC, Directive 2014/53/EU - RED, RoHS Directive 2011/65/EU, FCC Part 15.

### Connection with safety modules for safety applications:

Connection with safety modules  
CS AR-01•••••; CS AR-02•••••; CS AR-05•••••;  
CS AR-06•••••; CS AR-08•••••; CS AT-0•••••;  
CS AT-1•••••; CS MP•••••.

When connected to the safety module, the sensor can be classified as a control circuit device up to PDDb (EN 60947-5-3).

The system can be used in safety circuits up to PL e/SIL 3/category 4 in accordance with EN ISO 13849-1.

## Technical data

### Housing

Housing made of glass fibre reinforced technopolymer, self-extinguishing.  
Versions with integrated cable 5 x 0.25 mm<sup>2</sup> or 8 x 0.25 mm<sup>2</sup>, length 2 m, other lengths on request.

Versions with integrated M12 connector, plastic or stainless steel, AISI 304.

Versions with 0.2 m cable length and M12 connector, other lengths on request.

Protection degree: IP67 acc. to EN 60529  
IP69K acc. to ISO 20653  
(Protect the cables from direct high-pressure and high-temperature jets)

### General data

SIL (SIL CL) up to: SIL 3 acc. to EN 62061  
Performance Level (PL) up to: PL e acc. to EN ISO 13849-1  
Safety category up to: cat. 4 acc. to EN ISO 13849-1  
Interlock, no contact, coded: type 4 acc. to EN ISO 14119  
Level of coding acc. to EN ISO 14119: high with SM•IT actuators  
low with SM•OT actuators

### Safety parameters:

MTTF<sub>D</sub>: 1551 years  
PFH<sub>D</sub>: 1.19E-09  
DC: High  
Mission time: 20 years  
Ambient temperature for sensors without cable: -25°C ... +70°C (standard)  
-35°C ... +85°C (T8 option)  
Ambient temperature for sensors with cable: see table on page 63  
Storage and transport temperature: -35°C ... +85°C  
Vibration resistance: 10 gn (10 ... 150 Hz) acc. to IEC 60068-2-6  
Shock resistance: 30 gn; 11 ms acc. to EN 60068-2-27  
Pollution degree: 3  
Screw tightening torque: 0.8 ... 1 Nm

### Power supply electrical data

Rated operating voltage U<sub>e</sub>: 24 Vdc (-15% ... +10%) SELV/PELV  
10 ... 30 Vdc (version ST H•••1•••)  
Operating current at U<sub>e</sub> voltage:  
- minimum: 20 mA  
- with all outputs at maximum power: 550 mA  
Rated insulation voltage U<sub>i</sub>: 32 Vdc  
Rated impulse withstand voltage U<sub>imp</sub>: 1.5 kV  
External protection fuse: 1 A type Gg or equivalent device  
Overvoltage category: III

### Electrical data of IS1/IS2/I3/EDM inputs

Rated operating voltage U<sub>e1</sub>: 24 Vdc  
Rated current consumption I<sub>e1</sub>: 2.5 mA  
Switching time EDM state (t<sub>EDM1</sub>): 500 ms

### Electrical data of OS1/OS2 safety outputs

Rated operating voltage U<sub>e2</sub>: 24 Vdc  
Output type: PNP type OSSD  
Maximum current per output I<sub>e2</sub>: 0.2 A  
Minimum current per output I<sub>m2</sub>: 0.5 mA  
Thermal current I<sub>t2</sub>: 0.2 A  
Utilization category: DC13; U<sub>e2</sub>=24 Vdc, I<sub>e2</sub>=0.2 A  
Short circuit detection: Yes  
Overcurrent protection: Yes  
Internal self-resettable protection fuse: 0.3 A  
Duration of the deactivation impulses at the safety outputs: < 300 µs  
Permissible maximum capacitance between outputs: < 200 nF  
Permissible maximum capacitance between output and ground: < 200 nF  
Response time upon deactivation of input IS1 or IS2: < 15 ms  
Response time upon actuator removal: < 50 ms  
Availability time: 2 s

### Electrical data of O3 signalling output

Rated operating voltage U<sub>e3</sub>: 24 Vdc  
Output type: PNP  
Maximum current per output I<sub>e3</sub>: 0.1 A  
Utilization category: DC13; U<sub>e3</sub>=24 Vdc, I<sub>e3</sub>=0.1 A  
Short circuit detection: No  
Overcurrent protection: Yes  
Internal self-resettable protection fuse: 120 mA

### Actuation data

	SM•GT, SM•HT,SM•DT,SM•LT actuators	SM E•T actuators
Assured operating distance S <sub>ao</sub> :	8 mm	14 mm
Assured release distance S <sub>ar</sub> :	20 mm	26 mm
Rated operating distance S <sub>n</sub> :	11 mm	18 mm
Rated release distance S <sub>nr</sub> :	13 mm	20.5 mm
Repeat accuracy:	≤ 10 % s <sub>n</sub>	
Differential travel:	≤ 20 % s <sub>n</sub>	
RFID transponder frequency:	125 kHz	
Max. switching frequency:	1 Hz	
Distance between two sensors:	min. 50 mm	



### Features approved by UL

Electrical Ratings: 24 Vdc Class 2, 0,20 A  
 Environmental Ratings: Types 1, 4X, 6, 12, 13  
 Accessory for series ST for actuator switch series SM D, SM E, SM G, SM H, SM L.  
 The models provided with M12 Connector may be provided with the mating-Connectors-part (with Cord attached).

Please contact our technical department for the list of approved products.

### Features approved by TÜV SÜD

Supply voltage: 24 Vdc -15%...+10%  
 10 - 30 Vdc (ST H•••1•• only)  
 Protection degree: IP67 and IP69K  
 Ambient temperature: -25°C ... + 70°C  
 -35°C ... + 85°C (T8 option)  
 Storage and transport temperature: -25°C ... +85°C  
 PL, category: PL e, category 4

In compliance with standards: Machinery Directive 2006/42/EC, EN ISO 13849-1:2015, EN 60947-5-3:2013, EN 61508-1:2010 (SIL 3), EN 61508-2:2010 (SIL 3), EN 61508-3:2010 (SIL 3), EN 61508-4:2010 (SIL 3), IEC 62061:2005 (SIL CL3), IEC 62061:2005/AMD1:2012, IEC 62061:2005/AMD2:2015 (SIL CL3).

Please contact our technical department for the list of approved products.

### Selection table for ST G sensors with high level coded actuators

OS safety outputs	O signalling outputs	IS safety inputs	I programming inputs	EDM inputs	Programmable	with 0.2 m cable length and M12 connector		
						with cable	with M12 connector	
2	1	-	-	-	-	ST GD210M0.2-G1T	ST GD210N•-G1T	ST GD210MP-G1T
2	1	2	-	-	-	ST GD310M0.2-G1T	ST GD310N•-G1T	ST GD310MP-G1T
2	1	2	1	-	•	ST GD420M0.2-G1T	ST GD420N•-G1T	ST GD420MP-G1T
2	1	2	-	1	-	ST GD510M0.2-G1T	ST GD510N•-G1T	ST GD510MP-G1T

### Selection table for ST H sensor with high level coded actuator






Magnetic holding force	OS safety outputs	O signalling outputs	IS safety inputs	I programming inputs	EDM inputs	Programmable	with 0.2 m cable length and M12 connector		
							with cable	with M12 connector	
-	2	1	-	-	-	-	ST HD210M0.2-H1T	ST HD210N•-H1T	ST HD210MP-H1T
	2	1	2	-	-	-	ST HD310M0.2-H1T	ST HD310N•-H1T	ST HD310MP-H1T
	2	1	2	1	-	•	ST HD420M0.2-H1T	ST HD420N•-H1T	ST HD420MP-H1T
	2	1	2	-	1	-	ST HD510M0.2-H1T	ST HD510N•-H1T	ST HD510MP-H1T
25 N	2	1	-	-	-	-	ST HE210M0.2-H1TE	ST HE210N•-H1TE	ST HE210MP-H1TE
	2	1	2	-	-	-	ST HE310M0.2-H1TE	ST HE310N•-H1TE	ST HE310MP-H1TE
	2	1	2	1	-	•	ST HE420M0.2-H1TE	ST HE420N•-H1TE	ST HE420MP-H1TE
	2	1	2	-	1	-	ST HE510M0.2-H1TE	ST HE510N•-H1TE	ST HE510MP-H1TE
40 N	2	1	-	-	-	-	ST HE210M0.2-H1TF	ST HE210N•-H1TF	ST HE210MP-H1TF
	2	1	2	-	-	-	ST HE310M0.2-H1TF	ST HE310N•-H1TF	ST HE310MP-H1TF
	2	1	2	1	-	•	ST HE420M0.2-H1TF	ST HE420N•-H1TF	ST HE420MP-H1TF
	2	1	2	-	1	-	ST HE510M0.2-H1TF	ST HE510N•-H1TF	ST HE510MP-H1TF
50 N	2	1	-	-	-	-	ST HE210M0.2-H1TG	ST HE210N•-H1TG	ST HE210MP-H1TG
	2	1	2	-	-	-	ST HE310M0.2-H1TG	ST HE310N•-H1TG	ST HE310MP-H1TG
	2	1	2	1	-	•	ST HE420M0.2-H1TG	ST HE420N•-H1TG	ST HE420MP-H1TG
	2	1	2	-	1	-	ST HE510M0.2-H1TG	ST HE510N•-H1TG	ST HE510MP-H1TG

→ The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)

## Selection table for sensors

OS safety outputs O signalling outputs IS safety inputs I programming inputs EDM inputs Programmable	2	1	2	1	-	•	with 0.2 m cable length and M12 connector		with cable		with M12 connector	
							ST G series	ST H series	ST G series	ST H series	ST G series	ST H series
							ST GD420M0.2	ST HD420M0.2	ST GD420N•	ST HD420N•	ST GD420MP	ST HD420MP

## Selection table for actuators

					
Level of coding acc. to ISO 14119	Standard actuator	Standard actuator	Standard actuator with fixing on 2 levels	Miniaturized actuator	Large actuator
low	SM G0T	SM H0T	SM D0T	SM L0T	SM E0T
high	SM G1T	SM H1T	SM D1T	SM L1T	SM E1T

Type •0T actuators are all encoded with the same code. This implies that a sensor associated with an actuator type •0T can be activated by other actuators type •0T.

Type •1T actuators are always encoded with different codes. This implies that a sensor associated with an actuator type •1T can be activated only by a specific actuator. Another •1T type actuator will not be recognised by the sensor until a new association procedure is carried out (reprogramming). After reprogramming, the old actuator type •1T will no longer be recognized.

Reprogramming of the actuator can be performed repeatedly.

## Operating states

The multicolour signalling LED, which can be seen from both sides of the device, provides easy and intuitive verification of sensor operating state.



**GREEN LED**  
Normal operating state, with actuator inside detection zone, safety inputs activated (when present), safety outputs activated.



**YELLOW LED**  
Normal operating state, with actuator outside detection zone.




**RED LED**  
Error state: the error type is indicated to the user via LED illumination sequences and colour variations.



**PURPLE LED**  
Programming state during new actuator identification procedure.

## Internal operating wiring diagram

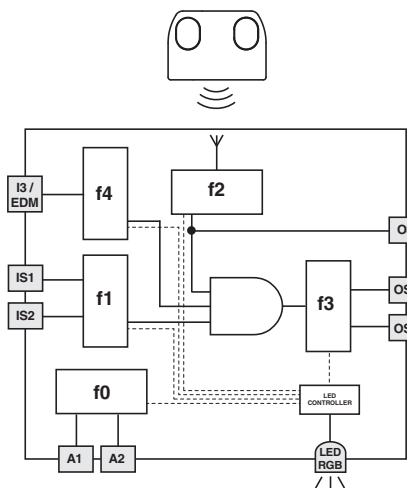

The adjacent diagram illustrates five logical, linked sub-functions of the sensor.

Function f0 is a basic function and includes the monitoring of the power supply as well as internal, cyclical tests.

Function f1 monitors the status of the inputs, whereas function f2 monitors the position of the actuator in the detection area.

Function f3 is intended to activate or deactivate the safety outputs and check for any faults or short circuits in the outputs.

The f4 function verifies the coherence of the EDM signal during safety output state changes (in versions with EDM input), or monitors the activation state of the programming input, activating the actuator replacement procedure (in versions with I3 programming input).


The safety-related function, which combines the sub-functions mentioned above, only activates the safety outputs if the input signals are correctly applied and the actuator is located within the safe zone.

The state of each function is displayed via signalling LED illumination and colour change. This immediately communicates the overall sensor state to the operator.



### Limit activation zone and safe activation zone

When aligning the sensor with the actuator, the multicolour signalling LED changes colour to indicate to the operator whether the actuator is in the limit activation zone or in the safe activation zone.

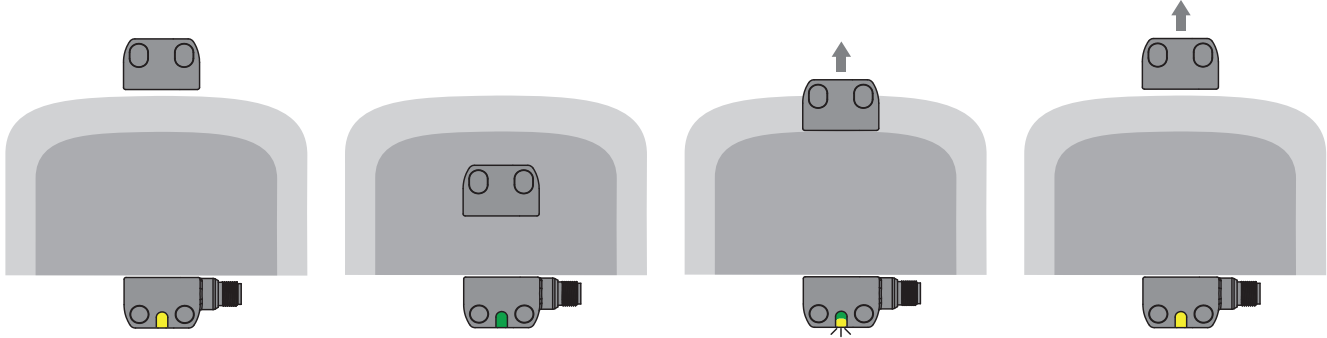



The sensor has power, the inputs are enabled, the outputs are disabled. The actuator is outside of the actuation zone. The LED is illuminated constant yellow.

If the actuator is moved inside the safe activation zone (dark grey area), the sensor activates the outputs. The LED is illuminated constant green.



When the actuator leaves the safe zone, the sensor keeps the safety outputs enabled. Entry into the limit activation zone (light grey area) is, however, indicated by the yellow LED flashing intermittently.

When the actuator leaves the limit activation zone, the sensor disables the outputs. The signalling LED illuminates again constant yellow.

### Operating distances for SM G•T, SM H•T, SM D•T, SM L•T actuators

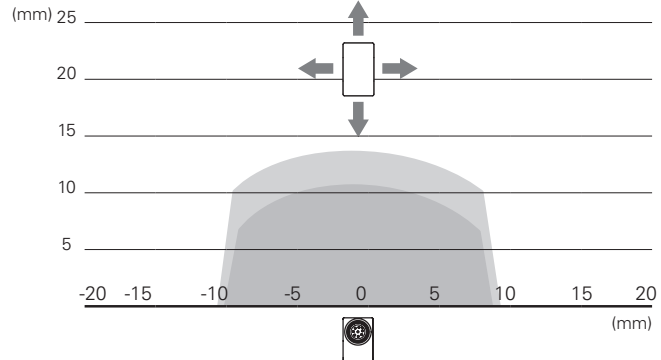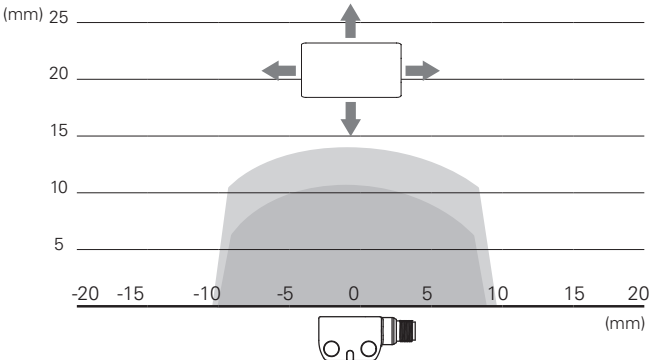

### Operating distances for SM E•T actuators

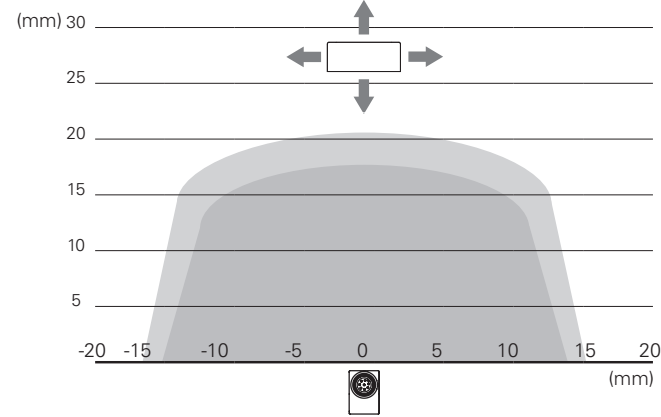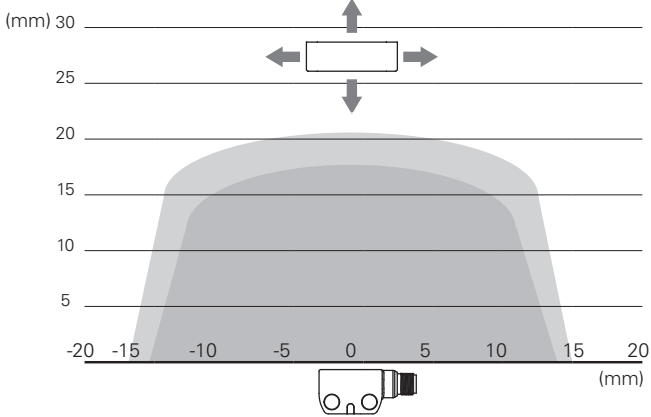


Legend:  
■ Rated operating distance  $s_n$  (mm)  
■ Rated release distance  $s_{nr}$  (mm)

**Note:** The progress of the activation areas is for reference only; the possible application on ferromagnetic surfaces can reduce the operating distances.

### Complete safety system

The use of complete and tested solutions guarantees the electrical compatibility between the sensors of the ST series and the safety modules from Pizzato Elettrica, as well as high reliability. The sensors have been tested with the modules listed in the adjacent table.

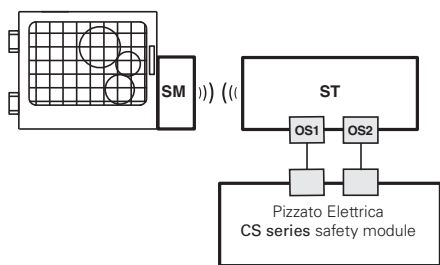

ST sensors can be used as individual devices provided that the outputs be evaluated by a Pizzato Elettrica safety module (see table for combinable safety modules).

### Compatible safety modules


Sensors	Safety modules	Safety module output contacts		
		Instantaneous safety contacts	Delayed safety contacts	Signalling contacts
ST G..... ST H.....	CS AR-01.....	2NO	/	1NC
	CS AR-02.....	3NO	/	/
	CS AR-05.....	3NO	/	1NC
	CS AR-06.....	3NO	/	1NC
	CS AR-08.....	2NO	/	/
	CS AT-0.....	2NO	2NO	1NC
	CS AT-1.....	3NO	2NO	/
	CS MP.....	see page 369		
	CS MF.....	see page 401		

All ST series sensors can be connected, provided that compatibility is checked, to safety modules or safety PLCs with OSSD inputs.


### Series connection with safety modules

Multiple ST series sensors can be **connected in series**, so as to simplify the safety system wiring. In this configuration, the safety outputs of the last sensor in the chain must be evaluated by a Pizzato Elettrica CS series safety module (see table for compatible safety modules).

Each ST sensor is additionally equipped with a **signalling output**, which – depending on the version – is activated or deactivated when the respective guard is closed. This information can be managed – according to the specific requirements of the implemented system – by a PLC or by a Pizzato Elettrica CS MP series safety module, which allows control of both safety and signalling outputs.

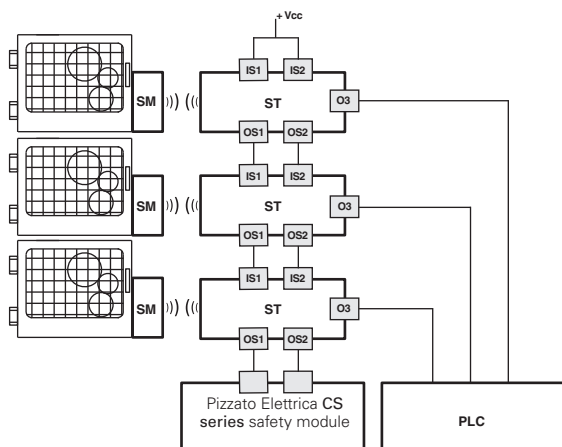

Connection with safety module and PLC

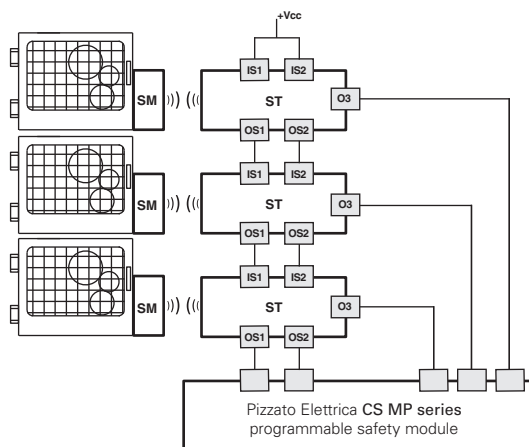


Connection with programmable safety module

### External device monitoring (EDM)


The ST ..5..... and ST ..9..... versions, in addition to maintaining the operating and safety characteristics of the ST series, allow control of **forcibly guided NC contacts of contactors or relays** controlled by the safety outputs of the sensor itself. This check is carried out by monitoring the EDM input (External Device Monitoring as defined in EN 61496-1) of the sensor.

As an alternative to the relays or contactors you can use Pizzato Elettrica expansion modules CS ME-03. See page 359.

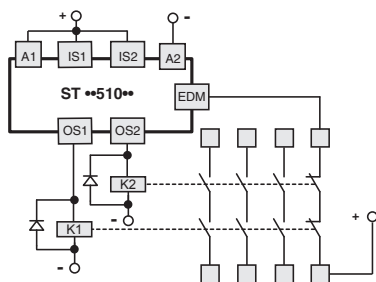


The EDM version, which is equipped with the IS safety inputs, **can be used at the end of a series** of ST sensors, **up to a maximum number of 32 devices**, while maintaining the maximum PL e safety level according to EN 13849-1.

For specific applications, this solution allows you to dispense with the safety module connected to the last device in the chain.

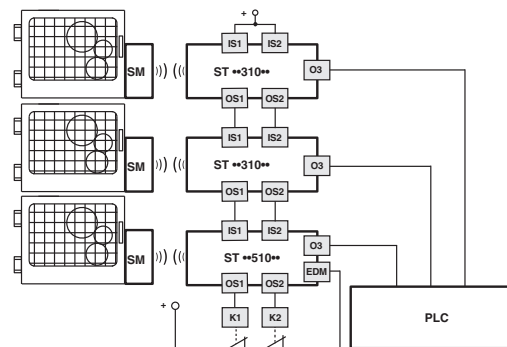

### O3 output inverted

Using versions with inverted O3 signalling output (articles ST ..6....., ST ..7....., ST ..8....., ST ..9.....) allows checking of the actual electrical connection of the sensor by an external PLC. The O3 output will be activated when the actuator is removed and the OS safety outputs are switched off.

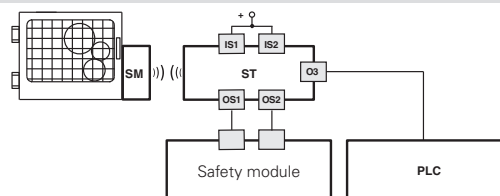




### Connection with safety modules


Connections with CS AR-08•••• safety modules

Input configuration with monitored start
2 channels / Category 4 / up to SIL 3 / PL e



Connections with CS AT-0••••• / CS AT-1••••• safety modules


Input configuration with monitored start
2 channels / Category 4 / up to SIL 3 / PL e



For features of the safety modules see page 305.


Connections with CS AR-05••••• / CS AR-06••••• safety modules

Input configuration with manual start (CS AR-05•••••) or monitored start (CS AR-06•••••)
2 channels / Category 4 / up to SIL 3 / PL e



Connection with safety module CS MP•••••0

The connections vary according to the program of the module
Category 4 / up to SIL 3 / PL e

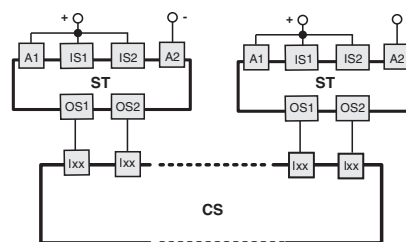


For application examples, see page 368.

### Series connection

To simplify series connections of the devices, various M12 connectors are available that allow complete wiring.

This solution significantly reduces installation times while at the same time maintaining the maximum safety levels PL e and SIL 3.


For more information see page 426.

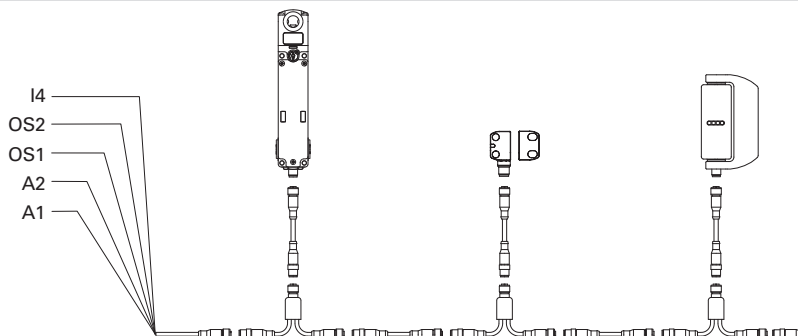

### Multitag function

This version of the device is supplied with two or more high level coded actuators, all of which can be acknowledged by the same sensor. The internal firmware of the sensor can be factory programmed, memorising up to 16 actuators and associating a different device behaviour to each of the same once the actuator has been acknowledged by the sensor.

The new multitag function lets you activate or deactivate the sensor outputs, and also send the information on which actuator is in front of the sensor, using a serial signal via the O3 signalling output. This signal can be sent and processed by a PLC.

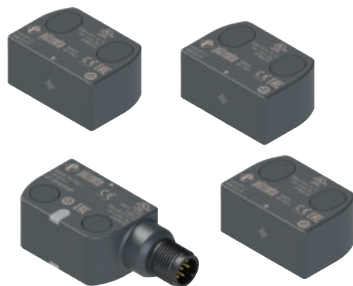

Programming code	Number of actuators	Programming
P1	2 x SM G1T	TAG0 activates the OS safety outputs TAG1 activates the O3 signalling output
P2	2 x SM G1T	TAG0 activates the OS safety outputs and sends "0" to O3 TAG1 activates the OS safety outputs and sends "1" to O3
P3	3 x SM G1T	TAG0 activates the OS safety outputs and sends "0" to O3 TAG1 activates the OS safety outputs and sends "1" to O3 TAG2 activates the OS safety outputs and sends "2" to O3
P4	4 x SM G1T	TAG0 activates the OS safety outputs and sends "0" to O3 TAG1 activates the OS safety outputs and sends "1" to O3 TAG2 activates the OS safety outputs and sends "2" to O3 TAG3 activates the OS safety outputs and sends "3" to O3


**Note:** The actuators are supplied with an indelible laser-engraved ID code.

Other programming options are available on request. Contact technical support for more information.

**Attention!** As required by EN ISO 14119 to be used in safety applications, all the actuators must be fixed immovably on the machine, and none of them can be used as a bypass to activate the device.



## Application example for ST G.....P1 articles

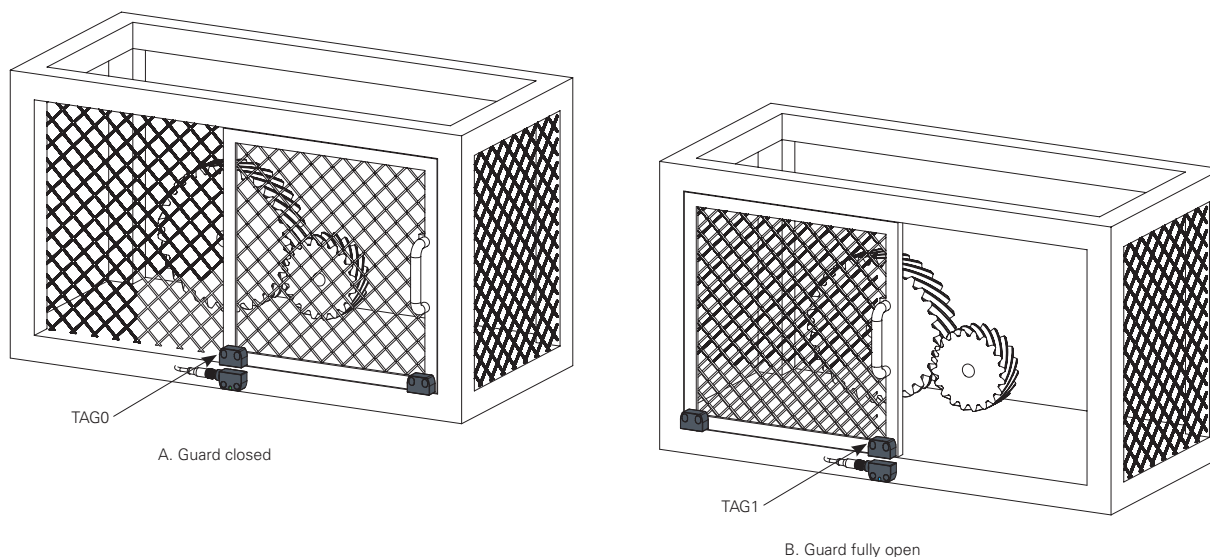


Article ST G.....P1 has a sensor with two actuators.

Compared to a traditional configuration with one single actuator, the device is able to not only recognise "guard closed" status through actuator 0 (in this case activating the OS safety outputs), but also "guard fully open" status, through actuator 1, which activates signalling output O3.

By sending this information to the machine control logic you can eliminate uncertainties caused by incomplete guard opening, increasing the precision and intrinsic safety of the machine.

This device is typically used on a press or any automatic machine in general, which uses a robot to load and unload workpieces if you want the robot to operate only when the guard is fully open.

## Application example for ST G.....P4 articles

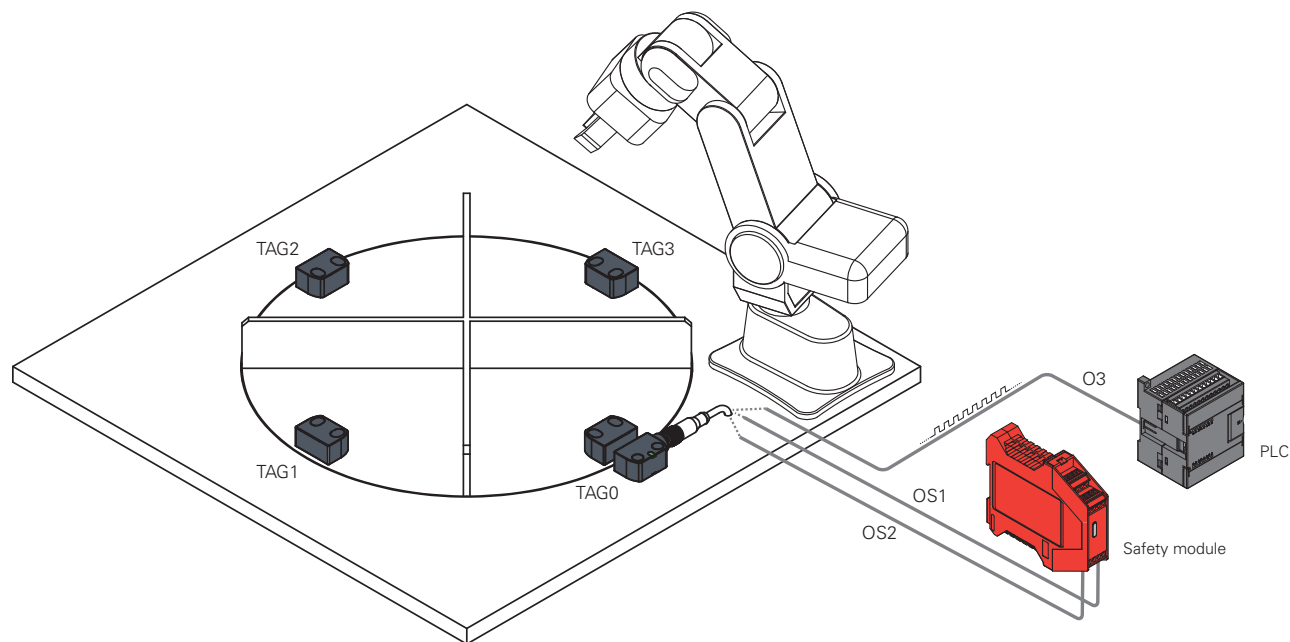

Article ST G.....P4 has a sensor with four actuators.

On a rotary table assembly station, the ST G sensor can be installed in combination with as many actuators as the available work stations (4 in the example shown).

When recognised by the sensor, each actuator activates the OS safety outputs and sends a string of bits with its ID code ("0" for TAG0, "1" for TAG1, up to "F" for TAG15, according to hexadecimal numbering). In this way, in every situation you can know which is the active work station, for example in the machine start-up phase or after an unexpected blackout.

The device has been designed for processing and assembly plants with multiple stations, robotised islands and machining centres.



### Transmission protocol on signalling output O3

The articles with multitag programming (in the special versions) can transmit an actuator identification code with a serial signal sent through the O3 signalling output when the actuator is in front of the sensor.

The information is sent in a sequence of bits (0, 1) which represents the ASCII code of the hexadecimal number associated with the actuator (TAG0 = 0, TAG1 = 1 ... TAG9 = 9, TAG10= A ... TAG15 = F). 8 bits are required for each TAG to complete the transmission.


For example, ID code "0" of the first actuator is sent by the sensor as a sequence of the following bits:

00110000 (ASCII code: "zero" digit)

The start bit is used at the beginning of the sequence to signal the start of the transmission, while the network goes into a rest state at the end of the transmission (network idle low or equal to 0, no stop bit) for a pre-set interval of time.


All you need is a PLC with a program that can code the O3 input transmission, to process the information so it can be used in the machine control logic.

Transmission parameters		
A	Coding type:	serial
B	Bit duration:	20 ms
C	Byte length:	160 ms (8 bit)
D	Interval:	200 ms
E	Network idle:	low
F	Start bit:	1
G	Stop bit:	none

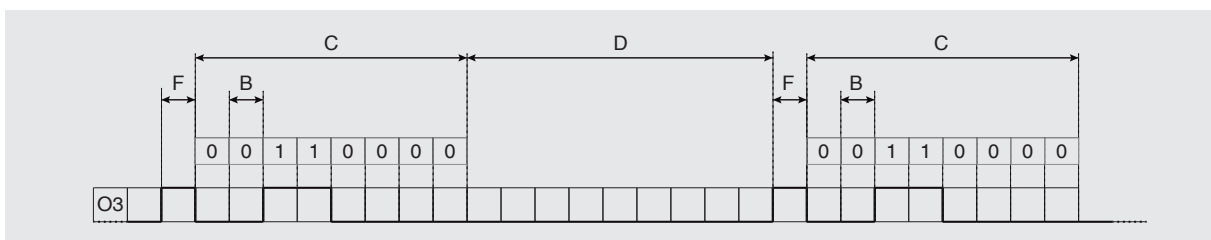


### Internal device connections

5-pole versions ST ●●1●●●●, ST ●●2●●●●, ST ●●6●●●●		
M12 connector	Cable	Connection
1	brown	A1 (+)
2	white	OS1
3	blue	A2 (-)
4	black	OS2
5	grey	O3 <sup>(a)</sup>



<sup>(a)</sup> deactivated output for ST ●●1●●●● articles.

8-pole versions ST ●●3●●●●, ST ●●4●●●●, ST ●●5●●●●, ST ●●7●●●●, ST ●●8●●●●, ST ●●9●●●●		
M12 connector	Cable	Connection
1	white	A1 (+)
2	brown	IS1
3	green	A2 (-)
4	yellow	OS1
5	grey	O3
6	pink	IS2
7	blue	OS2
8	red	not connected <sup>(a)</sup> I3 <sup>(b)</sup> EDM <sup>(c)</sup>



<sup>(a)</sup> for articles ST ●●3●●●●, ST ●●7●●●●.

<sup>(b)</sup> for articles ST ●●4●●●●, ST ●●8●●●●.

<sup>(c)</sup> for articles ST ●●5●●●●, ST ●●9●●●●.

#### Legend

- A1-A2: supply
- IS1-IS2 Safety inputs
- OS1-OS2: safety outputs
- O3: signalling output
- I3: programming input
- EDM: input for monitoring of NC contacts of the contactors

**Note:** Versions with customised pin assignments are available on request.

For female connectors, see page 419.

## Ambient temperature for sensors with cable


	Connection type	Output with cable			Output with cable and M12 connector	
	Cable type	N	N	H	8x0.25 mm <sup>2</sup>	5x0.25 mm <sup>2</sup>
Cable features	Conductors	8x0.25 mm <sup>2</sup>	5x0.25 mm <sup>2</sup>	8x0.25 mm <sup>2</sup>	8x0.25 mm <sup>2</sup>	5x0.25 mm <sup>2</sup>
	Application field	General	General	General, mobile installation	General	General
	In compliance with standards	03VV5-H	03VV5-H	03E7Q-H	03VV5-H	03VV5-H
	Sheath	PVC OIL RESISTANT	PVC OIL RESISTANT	PUR Halogen Free	PVC OIL RESISTANT	PVC OIL RESISTANT
	Self-extinguishing	IEC 60332-1-2 UL 758:FT1	IEC 60332-1-2 UL 758:FT1	IEC 60332-1-2 UL 758:FT1	IEC 60332-1-2 UL 758:FT1	IEC 60332-1-2 UL 758:FT1
	Oil resistant	UL 758 CSA 22.2 N°210	UL 758 CSA 22.2 N°210	UL 758 CSA 22.2 N°210	UL 758 CSA 22.2 N°210	UL 758 CSA 22.2 N°210
	Max. speed	50 m/min.	50 m/min.	300 m/min.	50 m/min.	50 m/min.
	Max. acceleration	5 m/s <sup>2</sup>	5 m/s <sup>2</sup>	30 m/s <sup>2</sup>	5 m/s <sup>2</sup>	5 m/s <sup>2</sup>
	Minimum bending radius	90 mm	75 mm	70 mm	90 mm	75 mm
	Outer diameter	6 mm	6 mm	6 mm	6 mm	6 mm
	End stripped	80 mm	80 mm	80 mm	/	/
	Copper conductors	Class 6 IEC 60228	Class 6 IEC 60228	Class 6 IEC 60228	Class 6 IEC 60228	Class 6 IEC 60228
	Engraving	6275	6267	6284	6275	6267
Ambient temperature extended (TB) standard	Cable, fixed installation	-25°C ... +70°C	-25°C ... +70°C	-25°C ... +70°C	-25°C ... +70°C	-25°C ... +70°C
	Cable, flexible installation	-15°C ... +70°C	-15°C ... +70°C	-25°C ... +70°C	-15°C ... +70°C	-15°C ... +70°C
	Cable, mobile installation	-15°C ... +70°C	-15°C ... +70°C	-25°C ... +70°C	-15°C ... +70°C	-15°C ... +70°C
	Cable, fixed installation	-35°C ... +85°C	-35°C ... +85°C	-35°C ... +85°C	-35°C ... +85°C	-35°C ... +85°C
	Cable, flexible installation	-15°C ... +85°C	-15°C ... +85°C	-15°C ... +85°C	-15°C ... +85°C	-15°C ... +85°C
	Cable, mobile installation	-15°C ... +85°C	-15°C ... +85°C	-15°C ... +85°C	-15°C ... +85°C	-15°C ... +85°C
	Approvals	CE cULusTUV EAC	CE cULusTUV EAC	CE cULusTUV EAC	CE cULusTUV EAC	CE cULusTUV EAC

## Accessories




Article	Description
VS SP5CA1	Polyurethane foam adhesive strip for SM H•T actuators

Protective polyurethane foam strip, with adhesive, applicable on SM H•T actuators, reduces noise and force in case of impact between sensor and actuator.



Article	Description
SM H9ZF	Door holding magnet (holding force 40 N)
SM H9ZQ	Door holding magnet (holding force 40 N, opposite polarity to SM H9ZF)


Holding magnets for use on machinery doors. The magnets are sealed inside a plastic cover and will not rust even in damp environments.






# Dimensional drawings


ST G••••N• sensor with cable

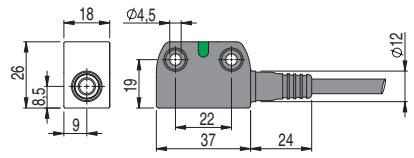


ST H••••N• sensor with cable

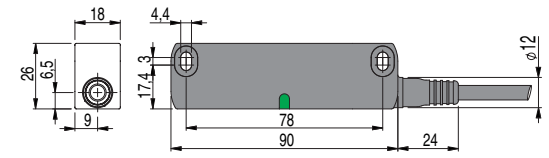


ST G••••M• sensor with M12 connector




ST H••••M• sensor with M12 connector

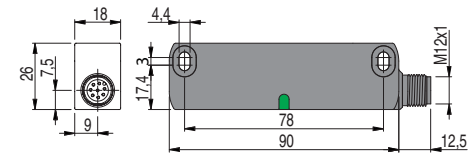


ST G••••M0.2 sensor with cable and M12 connector

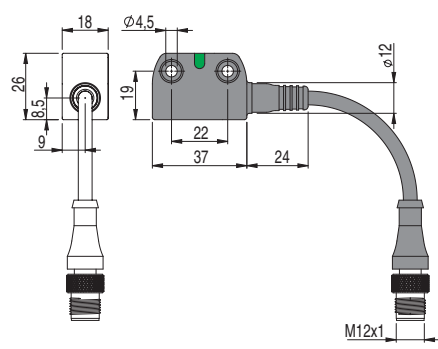


ST H••••M0.2 sensor with cable and M12 connector

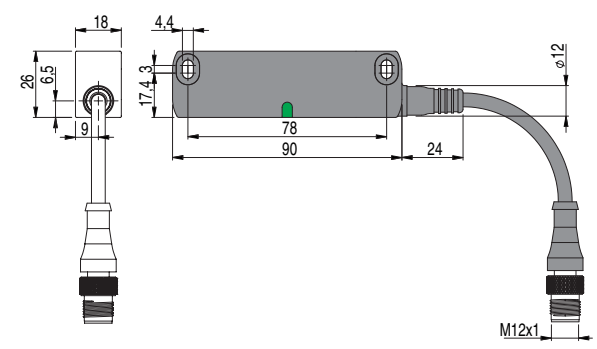


SM G•T actuator




SM H•T actuator




SM D•T actuator



SM L•T actuator



SM E•T actuator



All values in the drawings are in mm

→ The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)